
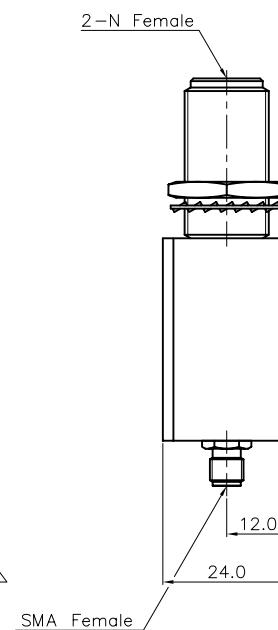
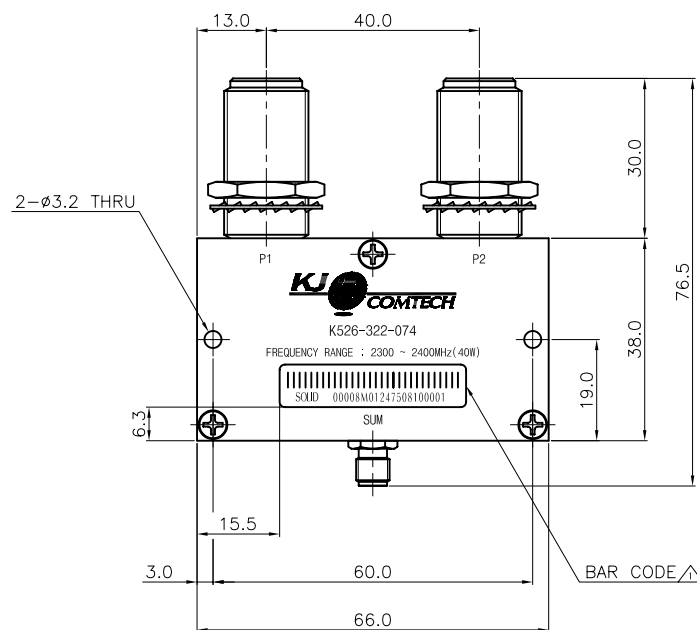


REVISION		
REV	DESCRIPTION	DATE
1	업체 요구로 인한 BAR CODE 추가(설번200810-0030)	2008.10.31.

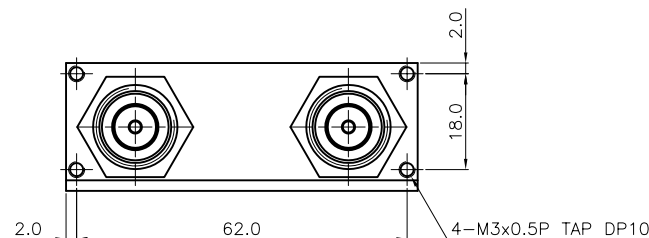


* ELECTRICAL SPECIFICATIONS

Frequency Range : 2300.0 ~ 2400.0MHz
Insertion Loss (Max.) : 3.3dB
Ripple (Max.) : 0.1dB (2300.0 ~ 2327.0MHz)
V.S.W.R (Max.) : 1.22 : 1
Isolation (Min.) : 25.0dB
Power Handling (Max.) : 40.0W
High Power Resistor (Max.) : 50.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

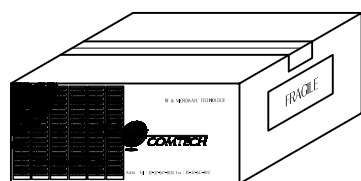

* 바코드 라벨 부착

- 제품 : 상단 도면을 참조하여 해당 위치에 부착
- BOX : 좌측 도면을 참조하여 BOX의 앞단 좌측 부터 부착

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	DATE 2007. 1. 2.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
	± 0.3	APPROVED BY		S.W.LEE					
	Angle	CHECKED BY		J.H.YOUN					
MATERIAL		DRAWN BY		K.I.CHO	TITLE 2WAY POWER DIVIDER				
		A6061 T6							
FINISH		SCALE	UNIT		A3	DWG NO.	PD00262-7/2		
White Chromate		1/1	mm			SHEET	1	OF	1