
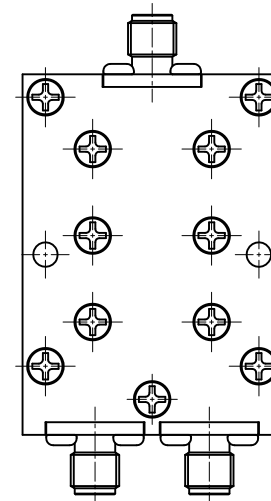
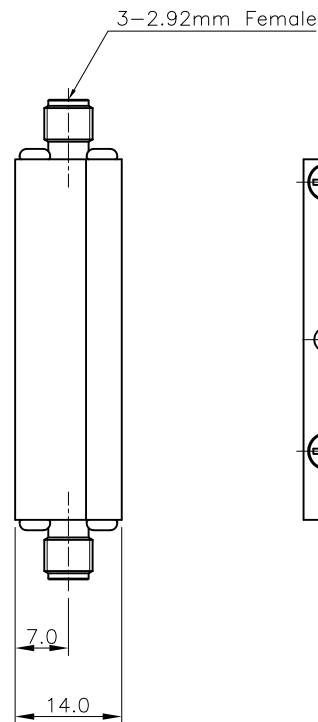


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2008.03.25.
2	도장제거	S.L.SON	J.H.YOUN	2019.12.16.

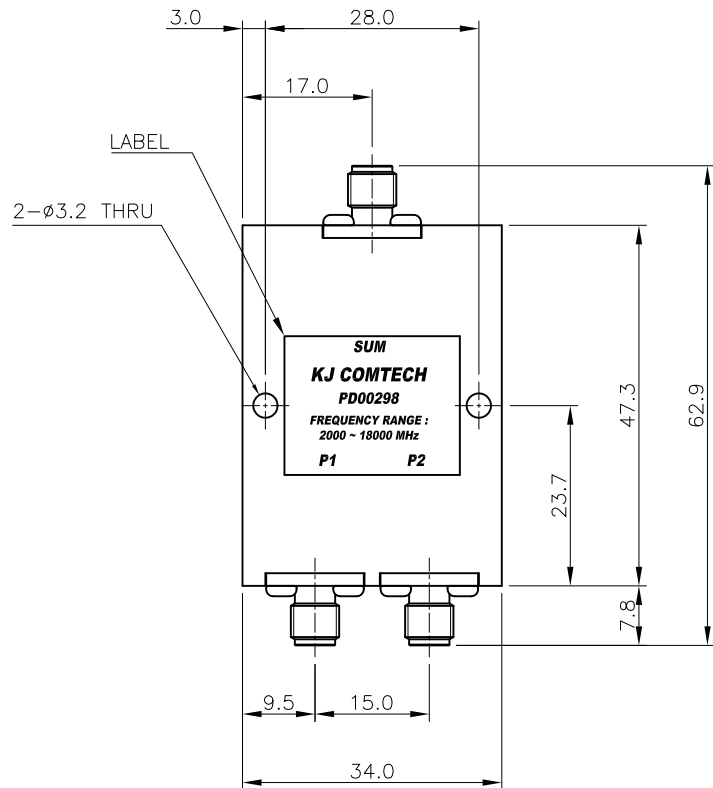

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2000.0 ~ 18000.0MHz
Insertion Loss (Max.) : 4.8dB
V.S.W.R (Max.) : Input : 1.5 : 1/Output : 1.6 : 1
Isolation (Min.) : 15.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS Body : SUS (Passivated)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : PTFE

TOLERANCE	Decimal	DATE 2019. 12. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00298-7/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	