

1



2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

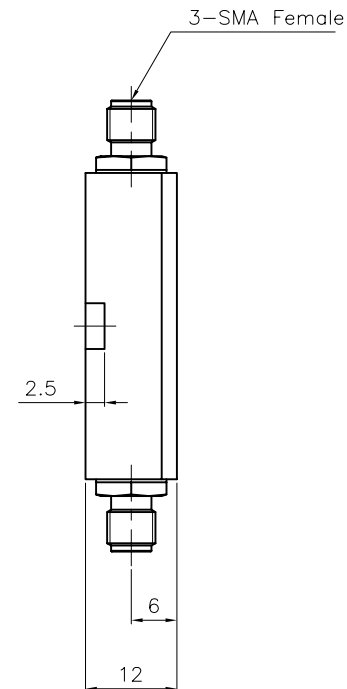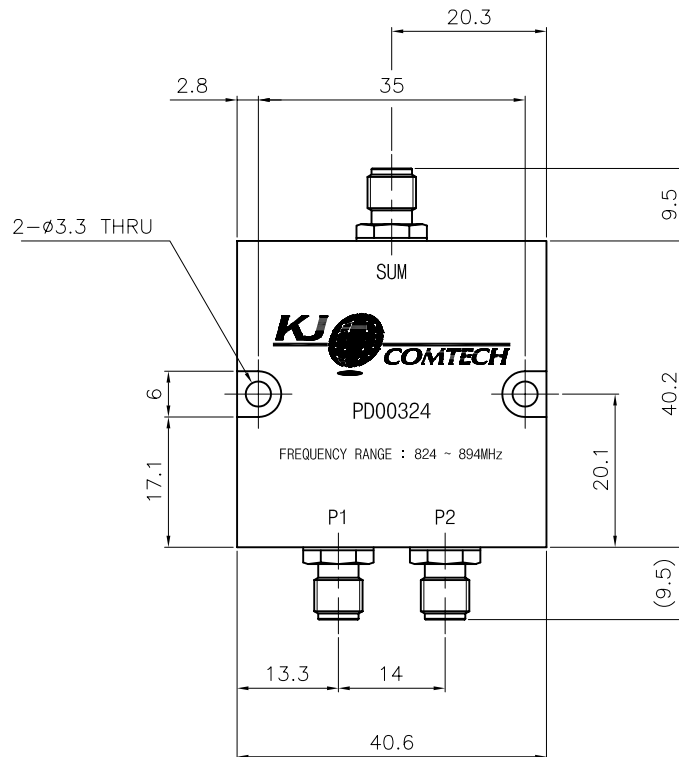

* ELECTRICAL SPECIFICATIONS
Frequency Range : 824.0 ~ 894.0MHz
Insertion Loss (Max.) : 3.31dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Phase Unbalance (Max.) : 2.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	± 0.3		DATE		2008. 6. 4.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle	± 1'		APPROVED BY							
					CHECKED BY						
MATERIAL		A6061 T6		DRAWN BY				TITLE			
								2WAY POWER DIVIDER			
FINISH		White Chromate		SCALE		1/1		UNIT		mm	