
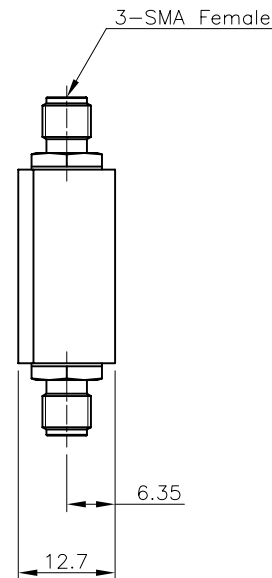


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.05.20.

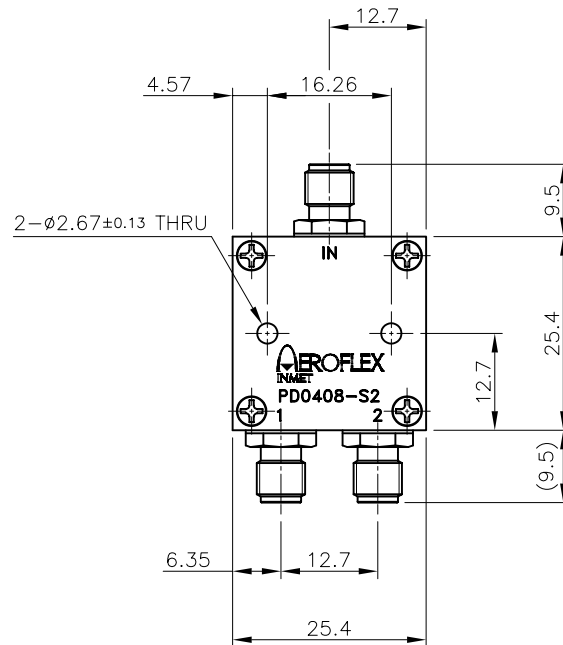

* ELECTRICAL SPECIFICATIONS

Frequency Range : 4000.0 ~ 8000.0MHz

Insertion Loss (Max.) : 3.35dB

V.S.W.R (Max.) : 1.3 : 1

Isolation (Min.) : 20.0dB

Amplitude Unbalance (Max.) : 0.2dB

Phase Unbalance (Max.) : 4.0°

Power Handling (Max.) : 10.0W

Impedance : 50Ω

Operating Temperature Range : -40°C TO +85°C

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : SUS 303 (Passivity)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

RoHS COMPLIANT

* OTHER SPECIFICATIONS

MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2009. 05. 20.				
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL	±1°	CHECKED BY	M.H.LEE			TITLE
	A6061 T6	DRAWN BY	K.I.CHO			
	FINISH	SCALE	UNIT			
Blue (DIC-422)	1/1	mm				
				DWG NO.		PD00332-8/1
				REVISION		I R SHEET 1 of 1