
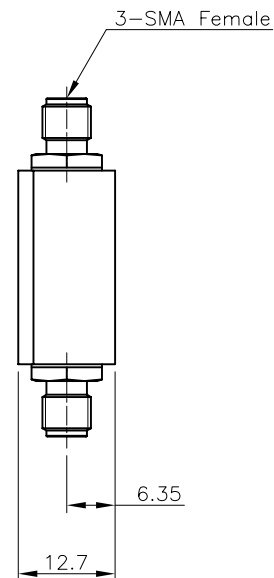


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2009.05.20.
A	제품 실크인쇄 변경 (KJ COMTECH 로고 추가)	K.I.CHO	J.H.YOUN	2010.08.13.

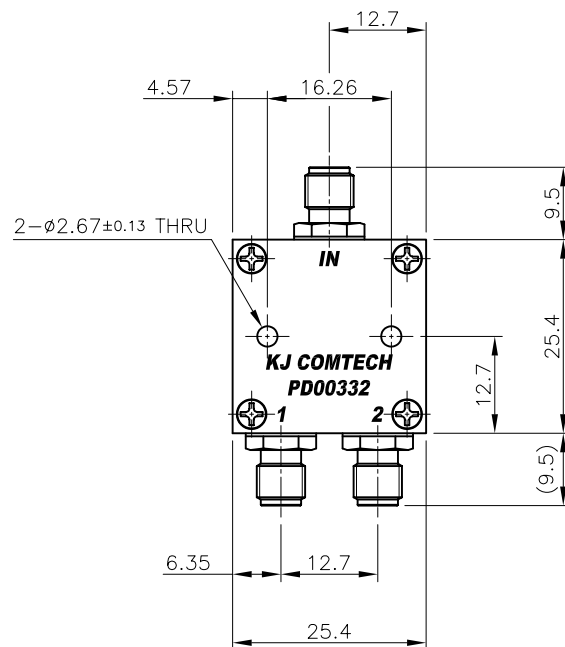

* ELECTRICAL SPECIFICATIONS

Frequency Range : 4000.0 ~ 8000.0MHz

Insertion Loss (Max.) : 3.35dB

V.S.W.R (Max.) : 1.3 : 1

Isolation (Min.) : 20.0dB

Amplitude Unbalance (Max.) : 0.2dB

Phase Unbalance (Max.) : 4.0°

Power Handling (Max.) : 10.0W

Impedance : 50Ω

Operating Temperature Range : -40°C TO +85°C

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : SUS 303 (Passivity)


CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

RoHS COMPLIANT

* OTHER SPECIFICATIONS

MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	±0.3	2010. 08. 13.						
	Angle	APPROVED BY	J.H.YOUN					
MATERIAL	±1°	CHECKED BY				TITLE		
	A6061 T6	DRAWN BY					K.I.CHO	
	Blue (DIC-422)	SCALE	UNIT				A4	
1/1	mm	DWG NO. PD00332-8/2						
			REVISION			A	SHEET	1 of 1