
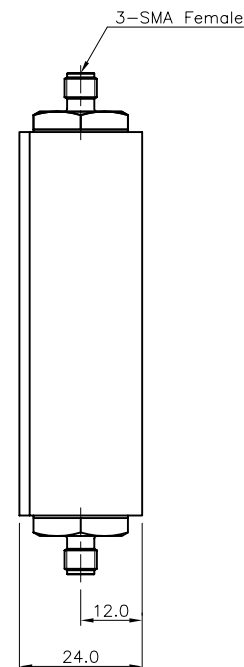


REVISION		
REV	DESCRIPTION	DATE
I R	최초 개정	2008.10.28.

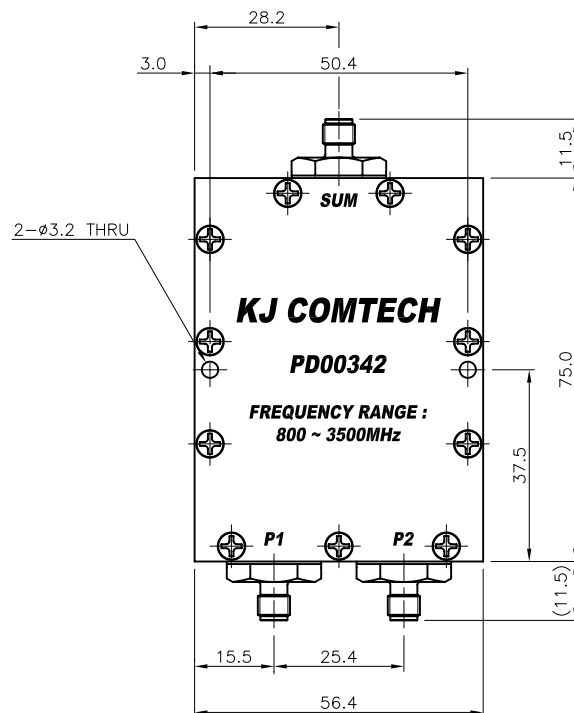

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 800.0 ~ 3500.0MHz
 Insertion Loss (Max.) : 3.61dB
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.2dB
 Phase Unbalance (Max.) : 3.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

주 기

1. SILK COLOR : WHITE

TOLERANCE	Decimal ±0.3	DATE	2008. 10. 28.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.W.LEE	
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN	TITLE 2WAY POWER DIVIDER
		DRAWN BY	K.I.CHO	
FINISH DIC-183 (Texture)	SCALE 1/1	UNIT mm		DWG NO. PD00342-8/1 REVISION I R SHEET 1 of 1