
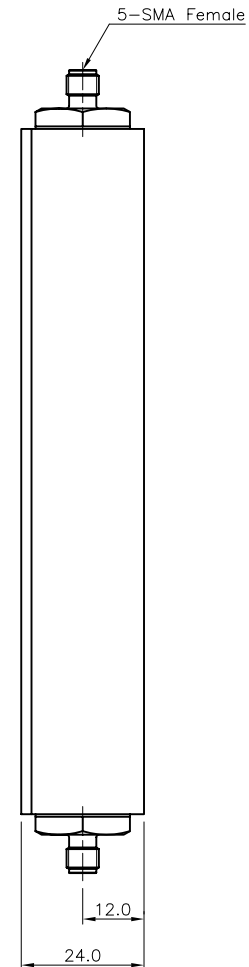


REVISION		
REV	DESCRIPTION	DATE
1R	최초 개정	2008.10.28.

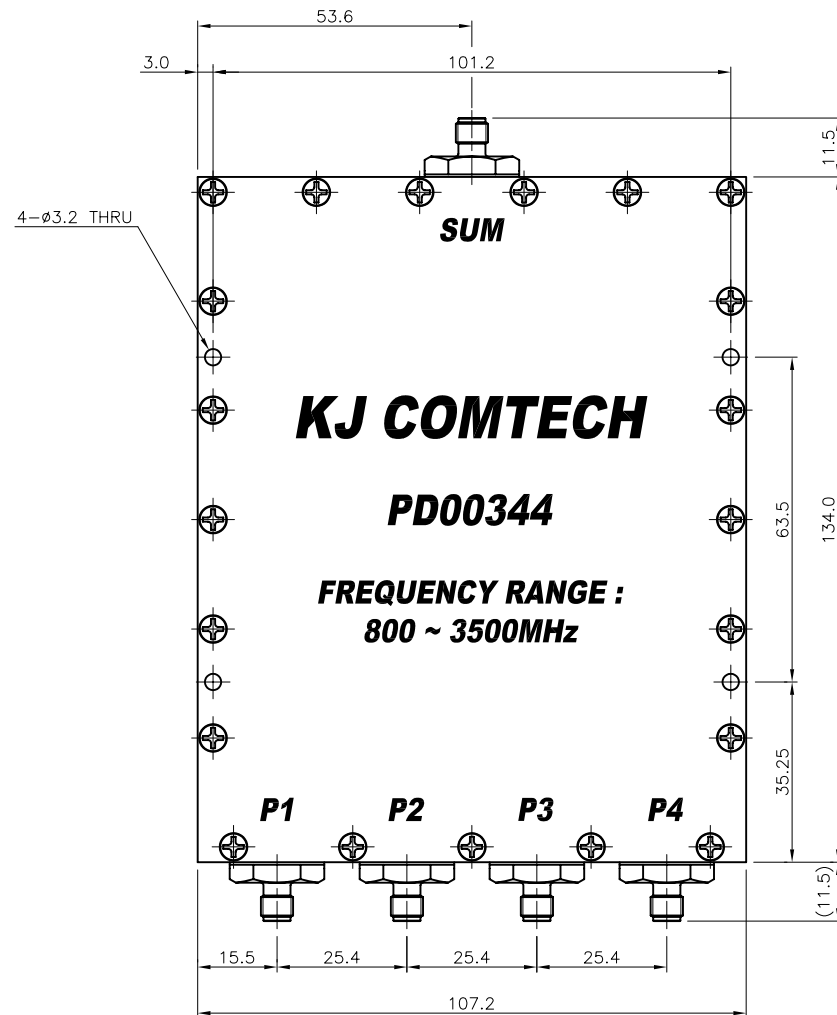

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 3500.0MHz
Insertion Loss (Max.) : 7.02dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.5dB
Phase Unbalance (Max.) : 6.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

주 기
1. SILK COLOR : WHITE

TOLERANCE	Decimal ±0.3	DATE	2008. 10. 28.		 KJ COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.W.LEE		
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN		TITLE 4WAY POWER DIVIDER
		DRAWN BY	K.I.CHO		
FINISH DIC-183 (Texture)	SCALE 1/1	UNIT mm			DWG NO. PD00344-8/1 REVISION I R SHEET 1 of 1