


REVISION		
REV	DESCRIPTION	DATE
I R	최초 개정	2008.10.28.

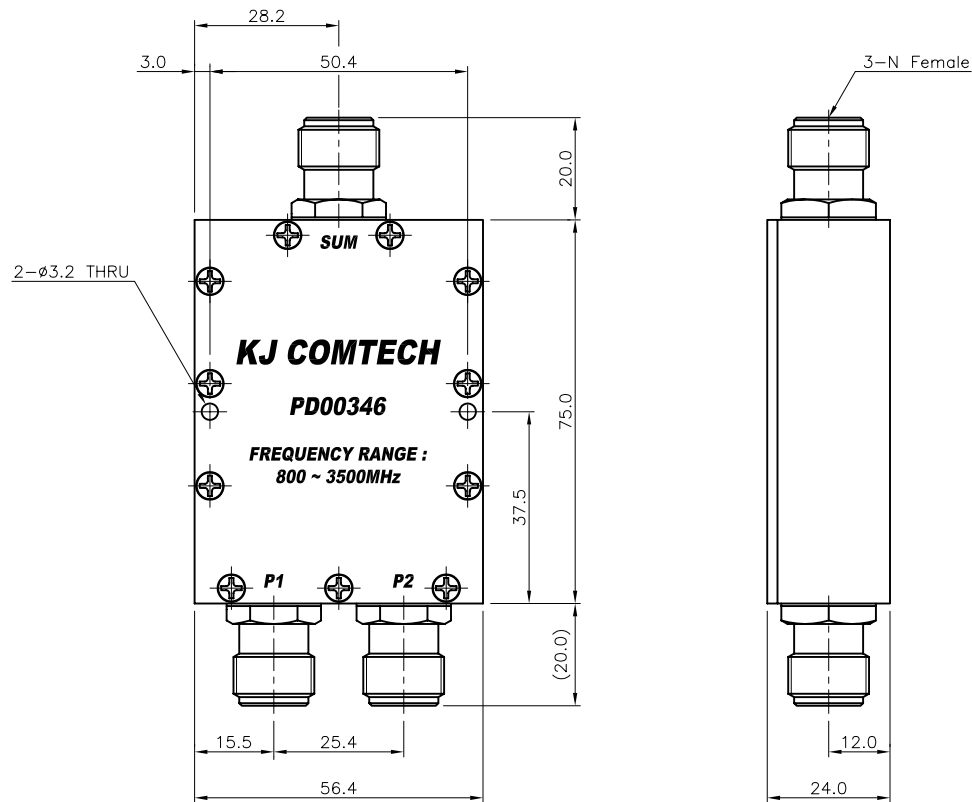

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 3500.0MHz
Insertion Loss (Max.) : 3.61dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Phase Unbalance (Max.) : 3.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

주 기
1. SILK COLOR : WHITE

TOLERANCE	Decimal ±0.3	DATE 2008. 10. 28.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	
	Angle ±1°	APPROVED BY S.W.LEE		
MATERIAL A6061 T6	FINISH DIC-183 (Texture)	CHECKED BY J.H.YOUN	TITLE 2WAY POWER DIVIDER	
		DRAWN BY K.I.CHO		
SCALE 1/1		UNIT mm	 A3 DWG NO. PD00346-8/1 REVISION I R SHEET 1 of 1	