



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2007.07.04.

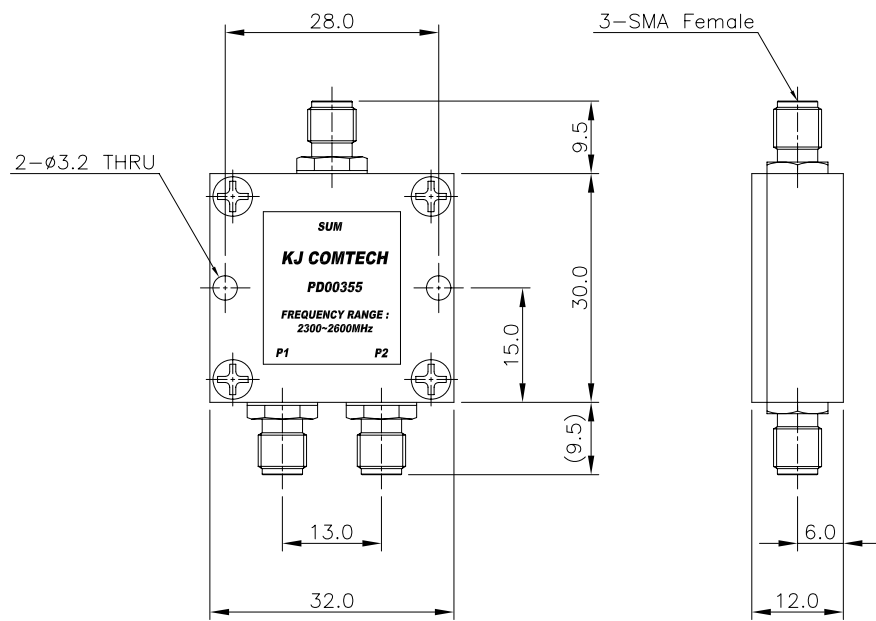

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 2300~2600 MHz
 Insertion Loss (Max.) : 3.3dB
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

* OTHER SPECIFICATIONS
 MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2007. 07. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY	I.C.KIM	TITLE 2WAY POWER DIVIDER	
		DRAWN BY	J.H.YOUN		
FINISH	White Chromate	SCALE	1/1	UNIT	mm
					DWG NO. PD00355-7/1 REVISION 1 SHEET 1 of 1