


REVISION		
REV	DESCRIPTION	DATE
I R	최초 개정	2008.11.18.

KJ COMTECH

PD00360

FREQUENCY RANGE : 800 ~ 900MHz

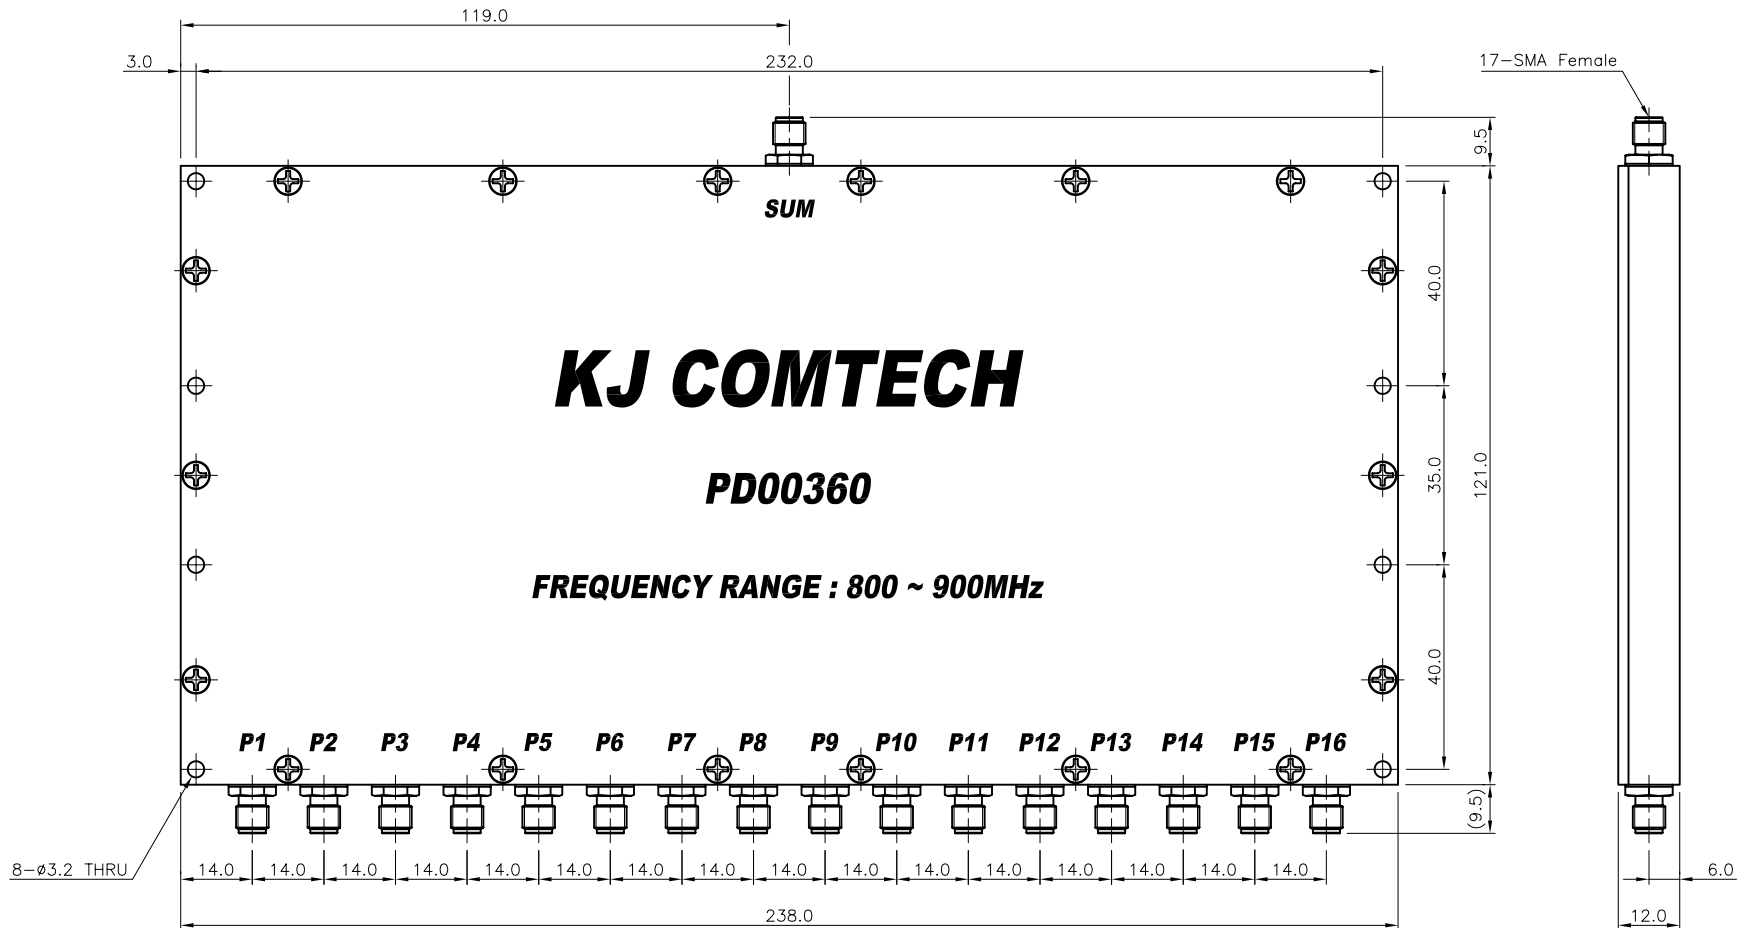

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 800.0 ~ 900.0MHz
 Insertion Loss (Max.) : 13.5dB
 V.S.W.R (Max.) : 1.3 : 1
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2008. 11. 18.
	Angle ±1°	APPROVED BY	S.W.LEE
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN
		DRAWN BY	K.I.CHO
FINISH	White Chromate	SCALE	1/1
		UNIT	mm
		TITLE	16WAY POWER DIVIDER
		DWG NO.	PD00360-7/1
		REVISION	I R SHEET 1 of 1

KJ COMTECH
 RF & MICROWAVE TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017