
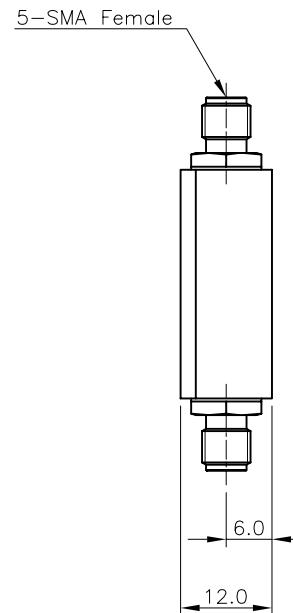
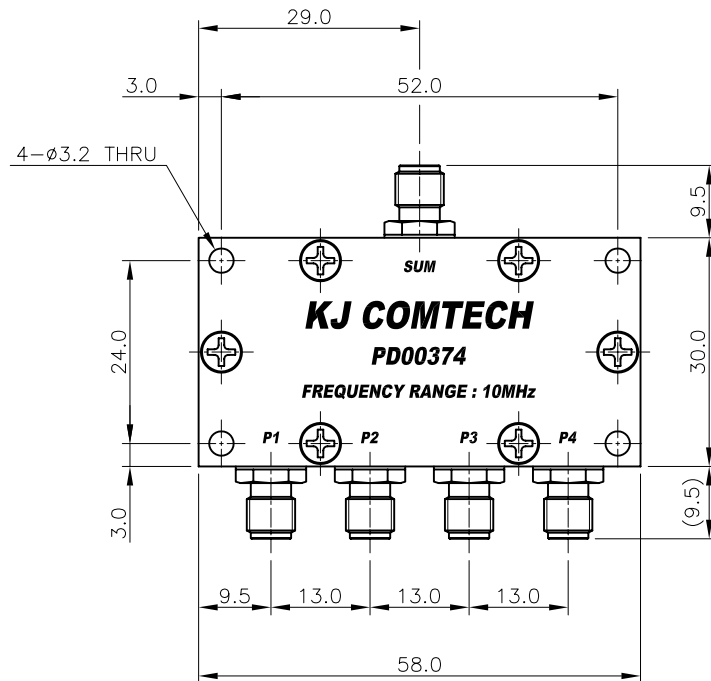


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.01.15.
A	LABEL 변경	2009.02.24.
B	Spec 조정	2009.08.18.



* ELECTRICAL SPECIFICATIONS
Frequency Range : 10.0MHz
Insertion Loss (Max.) : 6.8dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω
Operation Temperature : -30~+70℃

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2009. 08. 18.				
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL	±1°	CHECKED BY	M.H.LEE			TITLE
	A6061 T6	DRAWN BY	K.I.CHO			
	4WAY POWER DIVIDER					
FINISH	SCALE	UNIT		A4	DWG NO.	PD00374-7/3
White Chromate	1/1	mm			REVISION	B