
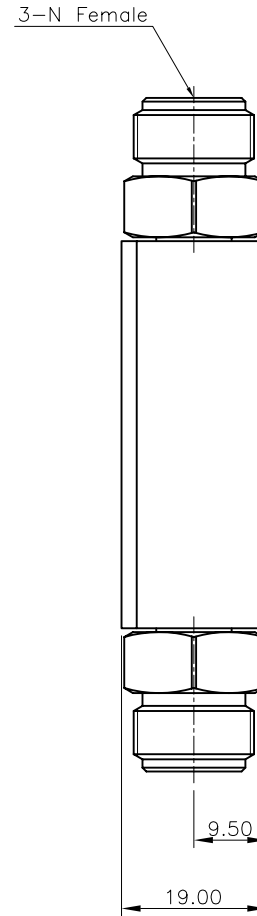


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.04.17.

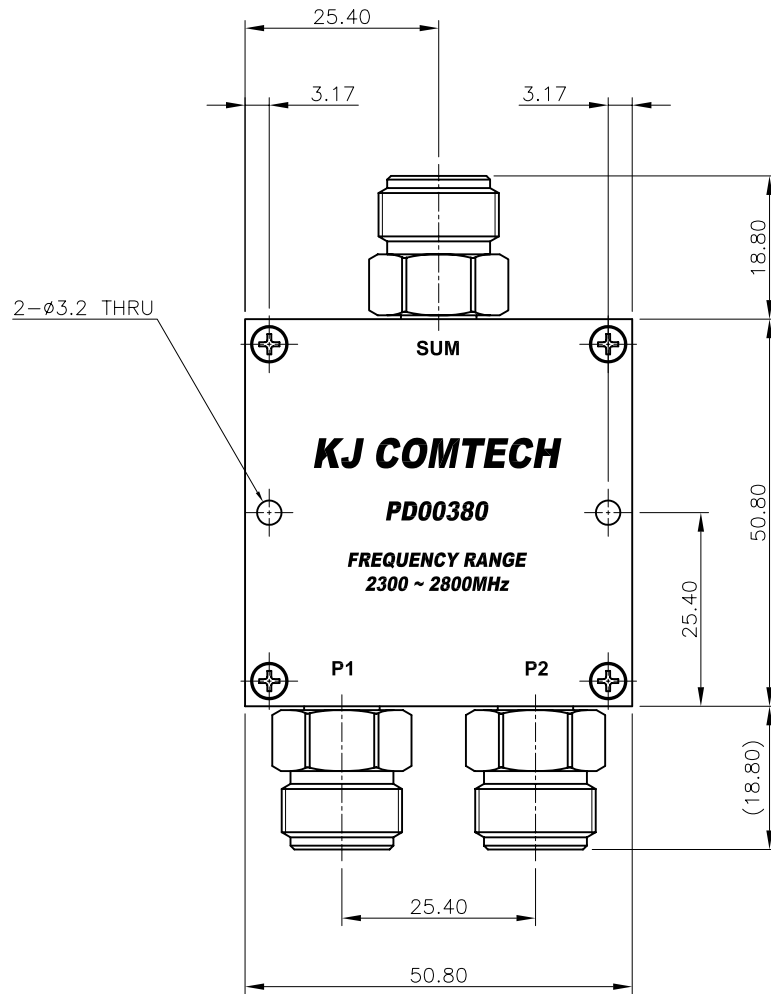

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2300 ~ 2800MHz
Insertion Loss (Max.) : 3.3dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2009. 04. 17.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	M.H.LEE	KJ COMTECH CO.,LTD. TITLE 2WAY POWER DIVIDER
		DRAWN BY	K.I.CHO	
FINISH White Chromate		SCALE	1/1	A4 DWG NO. PD00380-7/1 REVISION REV.A SHEET 1 of 1
		UNIT	mm	