


REVISION		
REV	DESCRIPTION	DATE
I R	Initial Registration	2009.04.27.


A

A

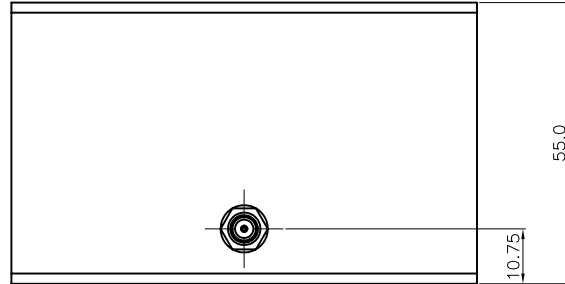



B

B

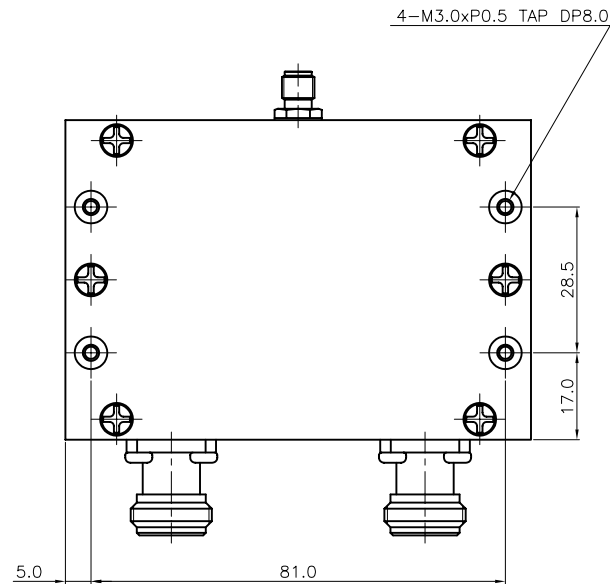


C

C

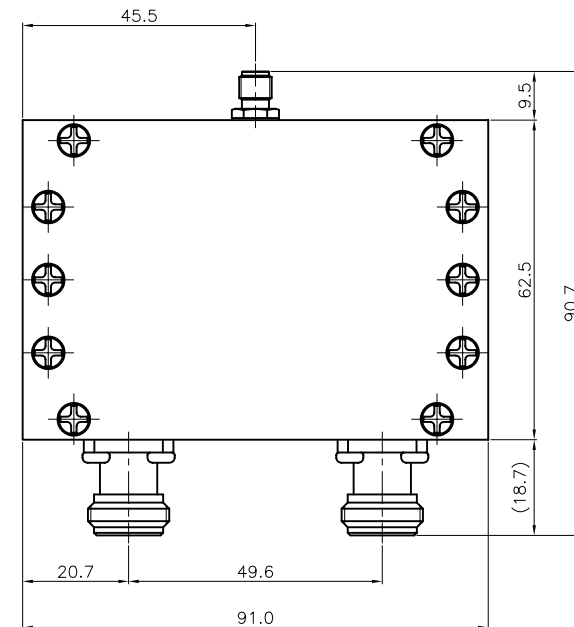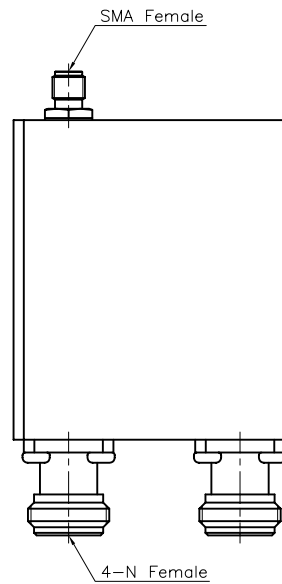

D

D

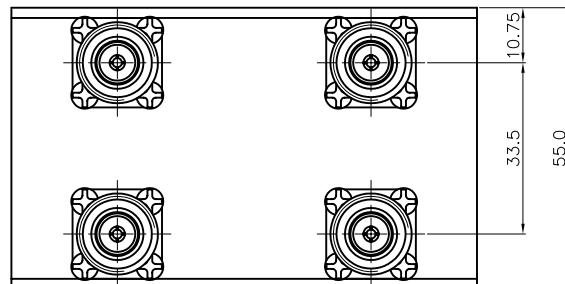

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0~2800.0MHz
Insertion Loss (Max.) : 7.0dB
VSWR (Max.) : 1.25 : 1
Isolation (MIN.) : 20.0dB
Input Power (Max.) : 1.0W

* MECHANICAL SPECIFICATIONS
Housing : A6061 T6 (White Chromate)
RF Connector : N-type Connector (Nickel Plate)
SMA Connector (Nickel Plate)

TOLERANCE	Decimal ±0.3	DATE 2009. 04. 27.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY M.H.LEE	TITLE 4WAY POWER DIVIDER	
		DRAWN BY K.I.CHO		
SCALE 1/1		UNIT mm		A3
			DWG NO. REVISION	PD00381-7/1 I R SHEET 1 of 1