
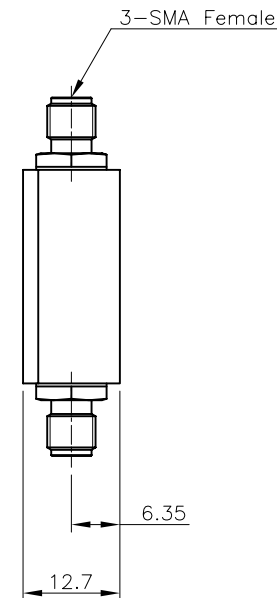


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2009.07.28.

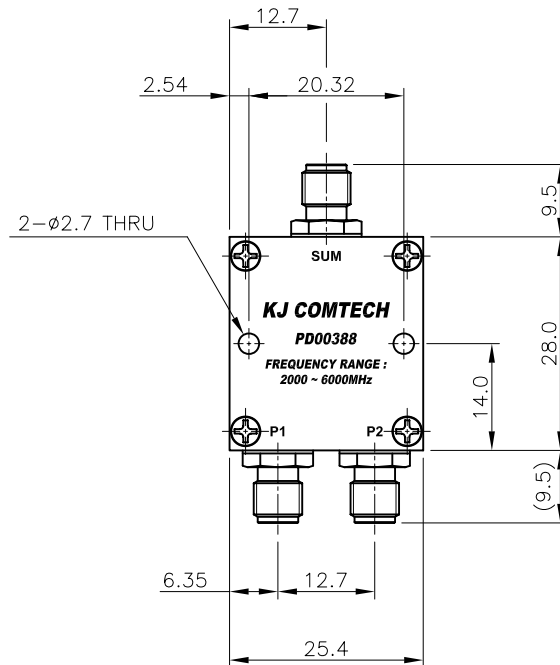

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 2000.0 ~ 6000.0MHz

Insertion Loss (Max.) : 3.5dB

V.S.W.R (Max.) : 1.3 : 1

Isolation (Min.) : 18.0dB

Power Handling (Max.) : 1.0W

Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

RoHS COMPLIANT

*** OTHER SPECIFICATIONS**

MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	±0.3	2009. 07. 28.							
	Angle	APPROVED BY	J.H.YOUN						
	±1°	CHECKED BY	M.H.LEE						
MATERIAL	A6061 T6	DRAWN BY	K.I.CHO						
FINISH		SCALE	UNIT						
White Chromate	1/1	mm							
					A4	DWG NO.	PD00388-7/1		
						REVISION	I	R	SHEET