
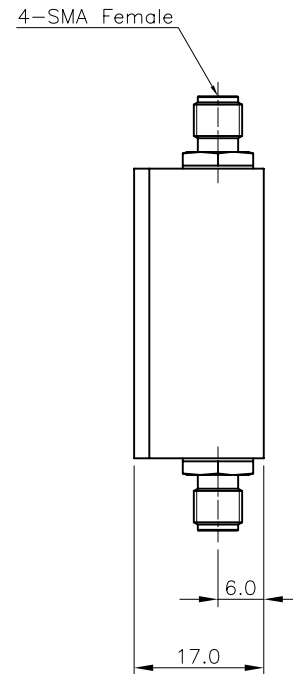



REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.07.15.

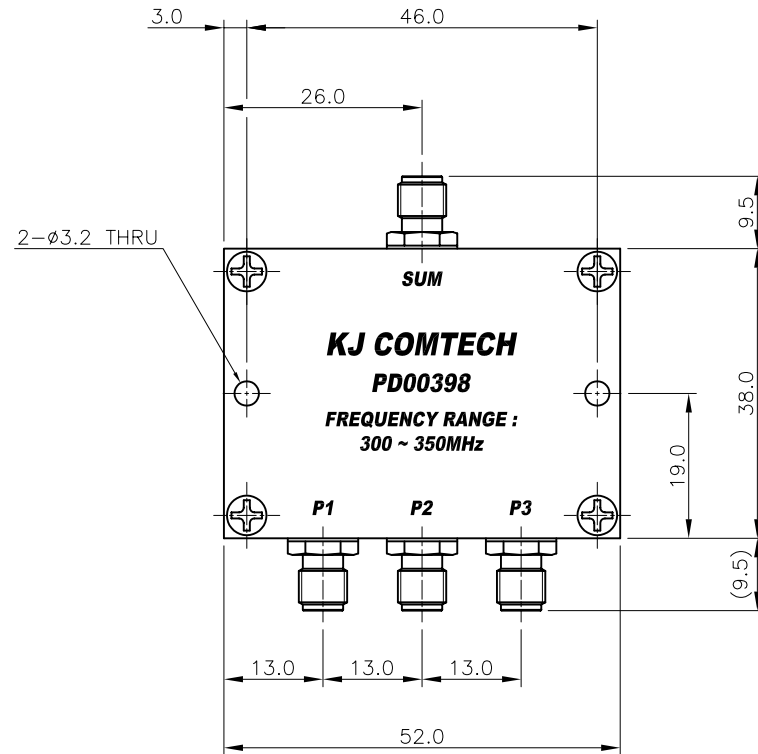

* ELECTRICAL SPECIFICATIONS
Frequency Range : 300.0 ~ 350.0MHz
Insertion Loss (Max.) : 5.8dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 10.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2009. 07. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY	M.H.LEE	TITLE 3WAY POWER DIVIDER	
		DRAWN BY	K.I.CHO		
FINISH	White Chromate	SCALE	1/1	UNIT	mm
				A4	DWG NO. PD00398-7/1
				REVISION	I R SHEET 1 of 1