
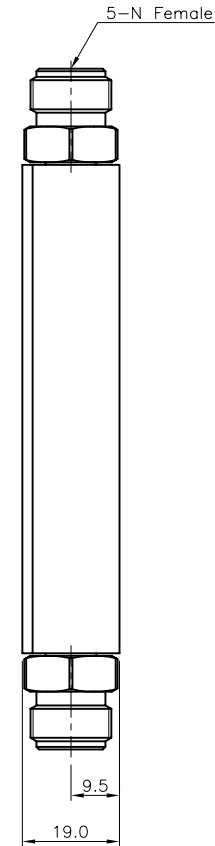


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.08.31.

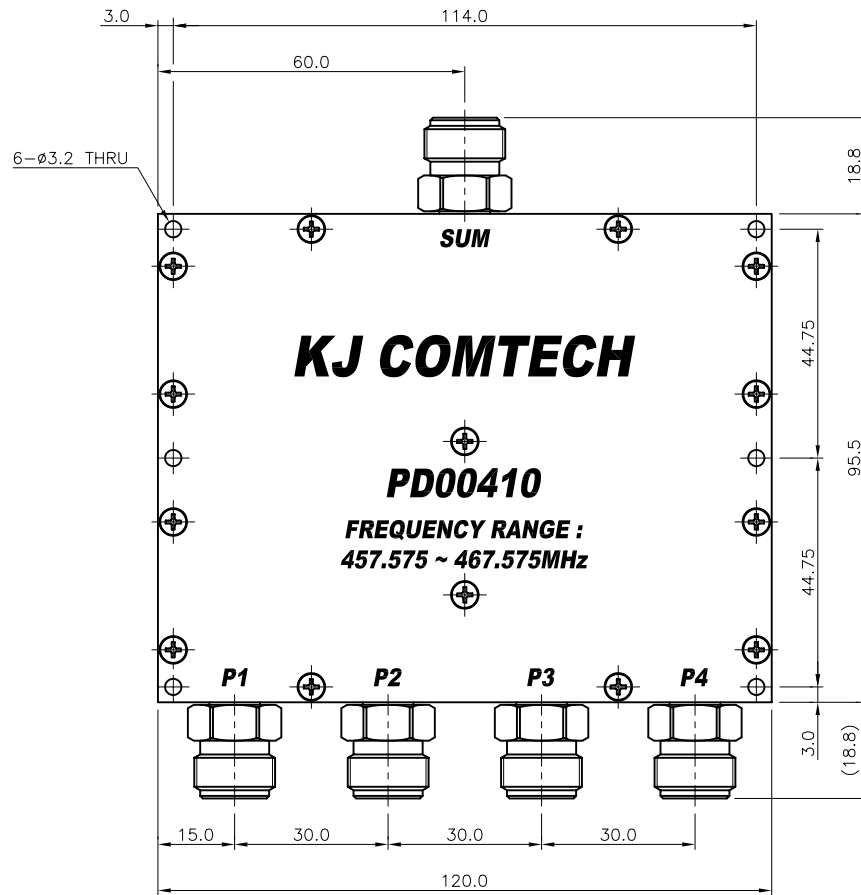

* ELECTRICAL SPECIFICATIONS
Frequency Range : 457.575 ~ 467.575MHz
Insertion Loss (Max.) : 6.8dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 40.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2009. 08. 31.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL A6061 T6	CHECKED BY M.H.LEE	TITLE 4WAY POWER DIVIDER			
	DRAWN BY K.I.CHO				
FINISH White Chromate	SCALE 1/1	UNIT mm	 A3	DWG NO. PD00410-7/1	
				REVISION	I R