
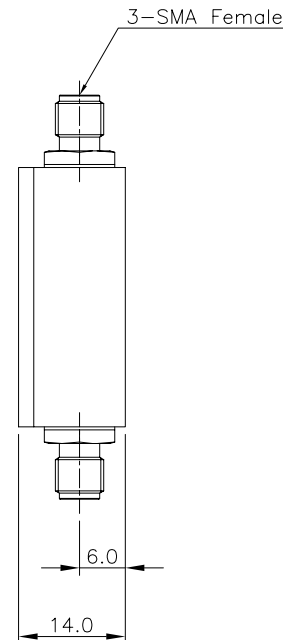


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.02.18.

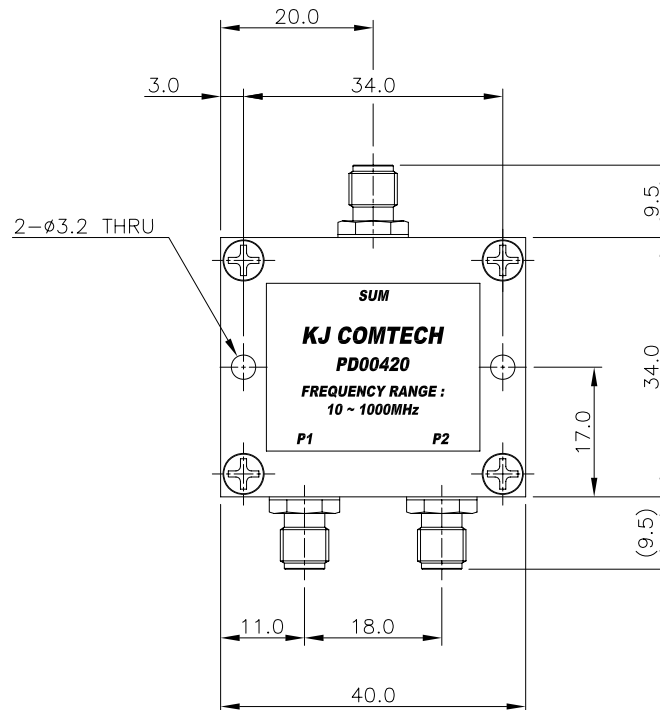

*** ELECTRICAL SPECIFICATIONS**
Frequency Range : 10.0 ~ 1000.0MHz
Insertion Loss (Max.) : 3.9dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0 Ω

*** MECHANICAL SPECIFICATIONS**
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

*** OTHER SPECIFICATIONS**
MARKING COLOR : BLACK

TOLERANCE	Decimal ± 0.3	DATE 2010. 02. 18.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY J.H.YOUN			
MATERIAL A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER		
	DRAWN BY K.I.CHO				
FINISH White Chromate	SCALE 1/1	UNIT mm	 A4	DWG NO. PD00420-7/1	
				REVISION I R SHEET 1 of 1	