



REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.01.26.

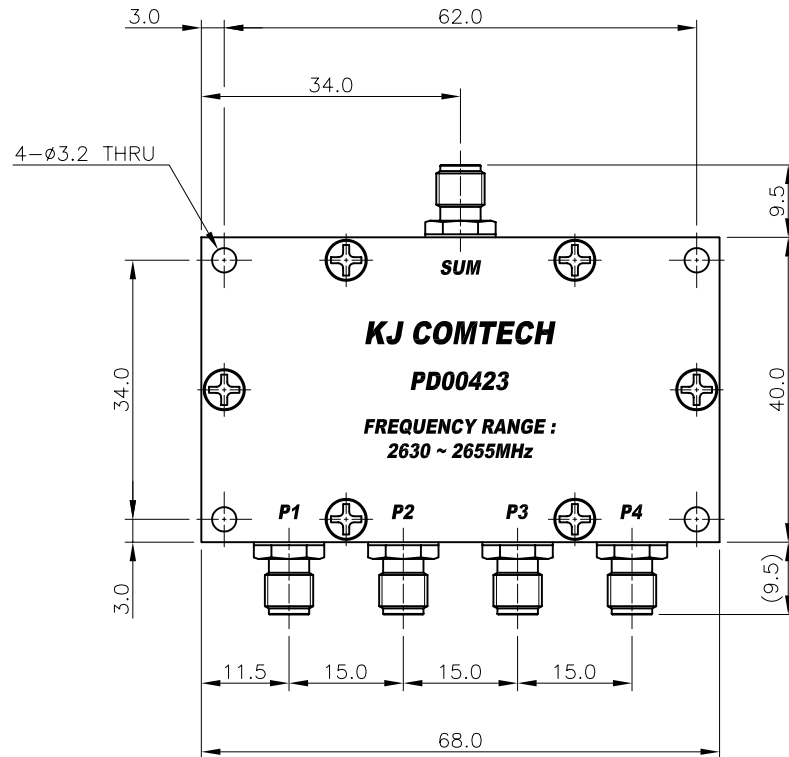


5-SMA Female

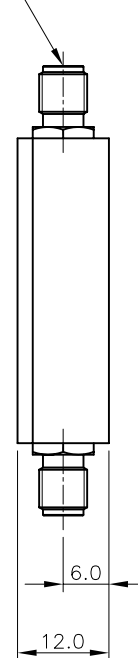

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2630.0 ~ 2655.0MHz
Insertion Loss (Max.) : 6.32dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 10.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2010. 01. 26.				
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL	±1°	CHECKED BY	TITLE			
	A6061 T6					
		DRAWN BY	K.I.CHO			
FINISH	White Chromate	SCALE	UNIT	 A4		
		1/1	mm			
				DWG NO. PD00423-7/1		
				REVISION I R SHEET 1 of 1		