


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.02.10.
OR	Finish , Silk Color Changed	2010.02.26.

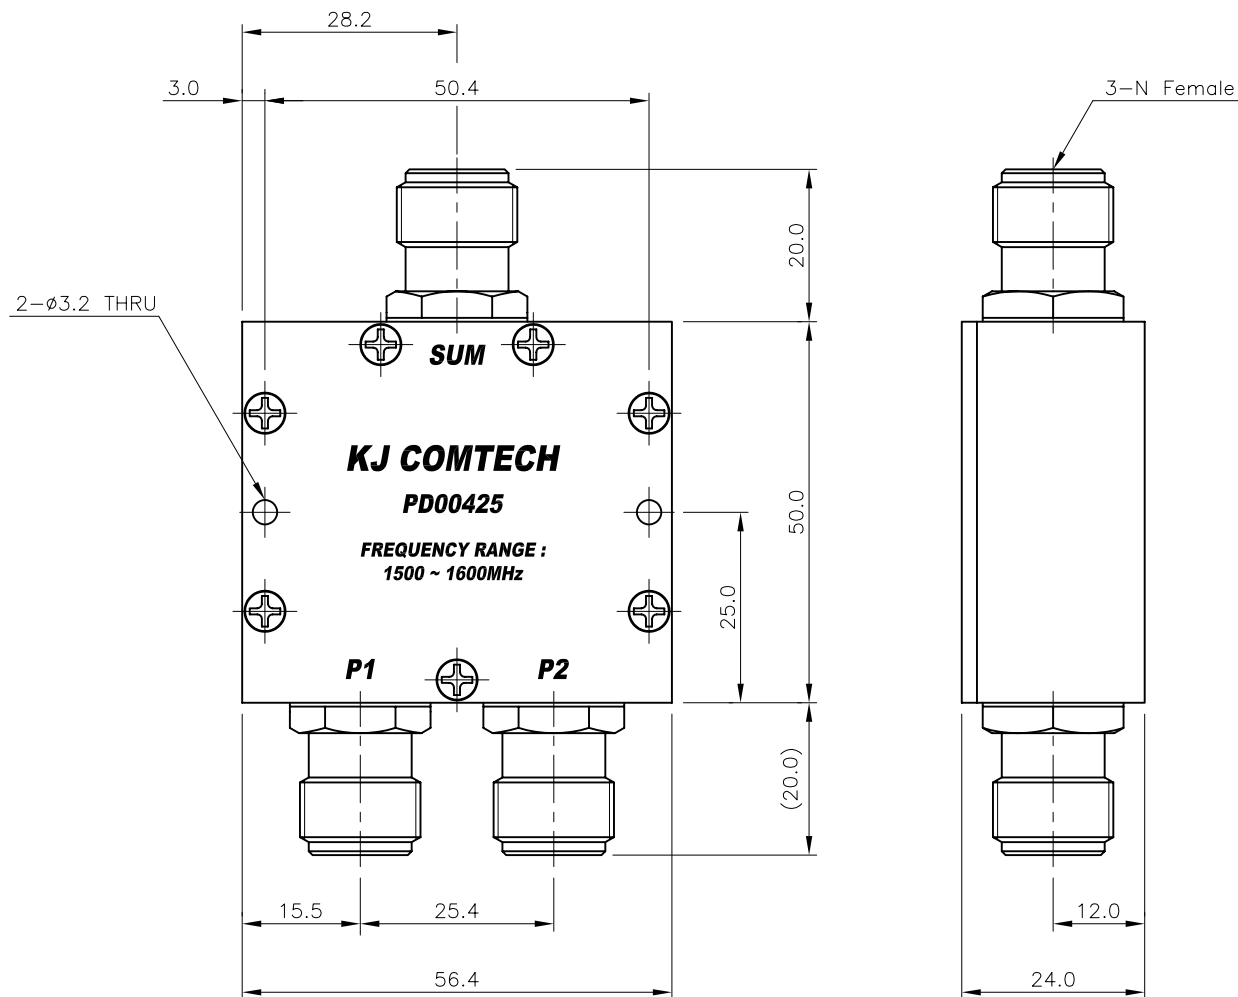

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1500.0 ~ 1600.0MHz
 Insertion Loss (Max.) : 3.31dB
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50 Ω
 DC POWER(Max.) : 12V/2A

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON
 SILK COLOR : BLACK
 FINISH : Blue Paint, Color DIC-422

*ENVIRONMENTAL SPECIFICATION

IP67, RoHS
 -40~85 $^{\circ}$ C

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	± 0.3	2009. 02. 10.				
MATERIAL	Angle	APPROVED BY		J.H.YOUN		
	$\pm 1^{\circ}$	CHECKED BY		TITLE 4WAY POWER DIVIDER		
FINISH	A6061 T6	DRAWN BY				A4 DWG NO. PD00425-8/1 REVISION I R SHEET 1 of 1
		SCALE	UNIT			
DIC-422		1/1	mm			