
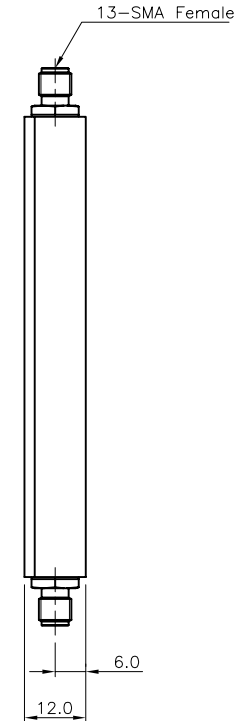


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.03.15.

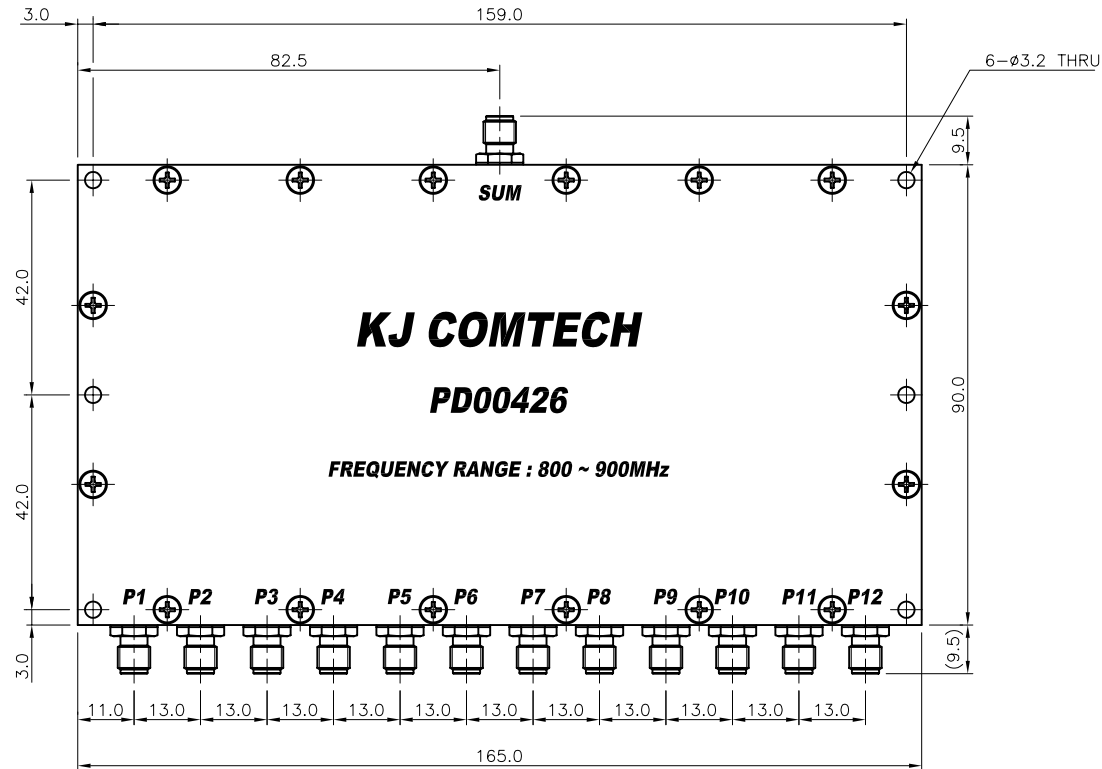

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 900.0MHz
Insertion Loss (Max.) : 12.0dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2010. 03. 15.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061 T6	CHECKED BY		TITLE 12WAY POWER DIVIDER	
	DRAWN BY K.I.CHO			
FINISH White Chromate	SCALE 1/1	UNIT mm	A3	DWG NO. PD00426-7/1
				REVISION I R

KJ COMTECH
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017