
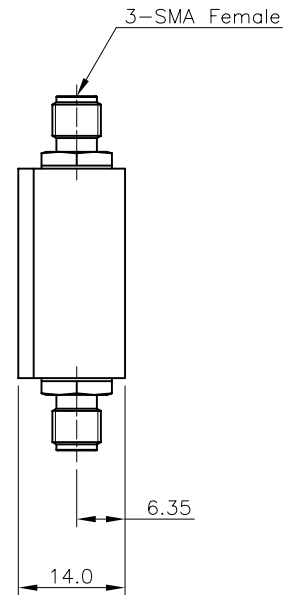


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.03.15.

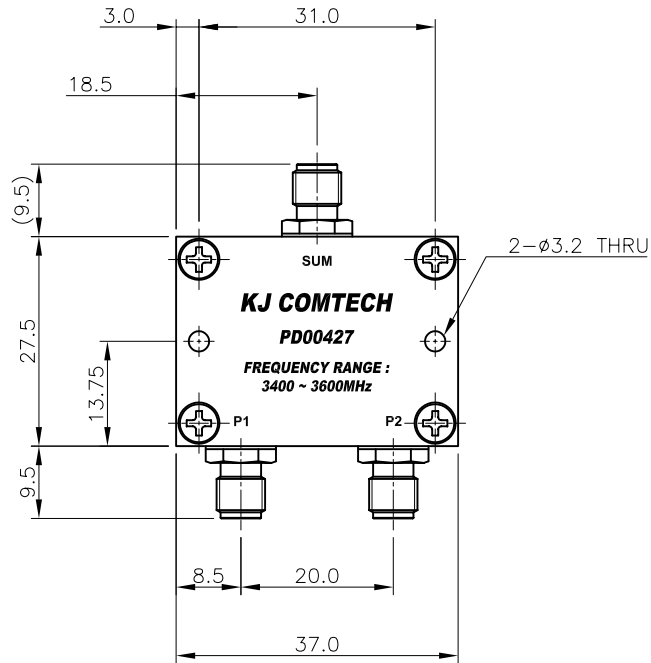

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 3400.0 ~ 3600.0MHz
 Insertion Loss (Max.) : 3.3dB
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON
 RoHS COMPLIANT

*** OTHER SPECIFICATIONS**

MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE 2010. 03. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY		TITLE 2WAY POWER DIVIDER
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	DWG NO. PD00427-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4