
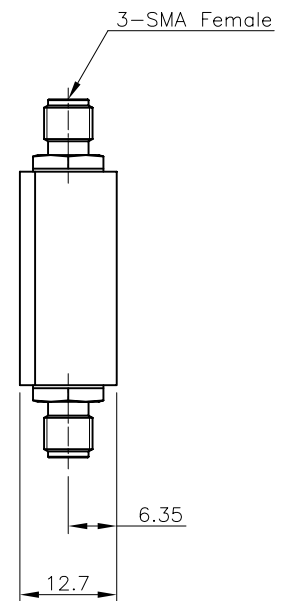


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.07.05.

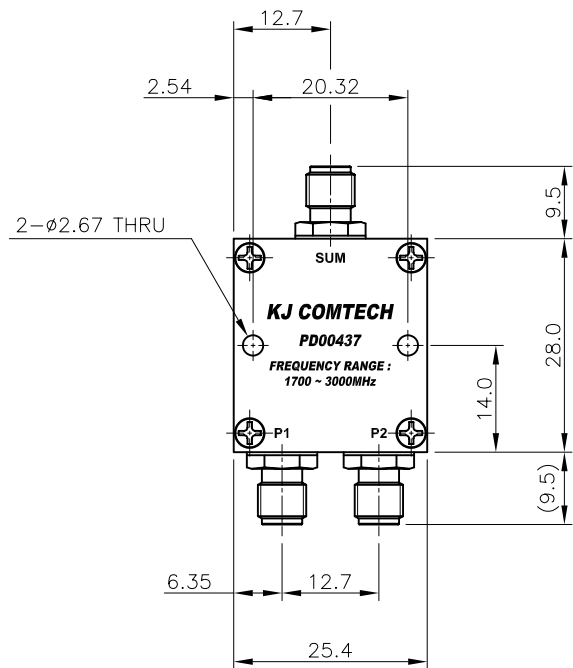

*** ELECTRICAL SPECIFICATIONS**


Frequency Range : 1700.0 ~ 3000.0MHz
 Insertion Loss (Max.) : 3.5dB
 V.S.W.R (Max.) : 1.3 : 1
 Isolation (Min.) : 18.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON
 RoHS COMPLIANT

*** OTHER SPECIFICATIONS**

MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2010. 07. 05.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER	
		DRAWN BY	K.I.CHO		
FINISH White Chromate		SCALE	1/1	UNIT	mm
				DWG NO. PD00437-7/1 REVISION I R SHEET 1 of 1	A4