


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	K.I.CHO	J.H.YOUN	2010.09.13.

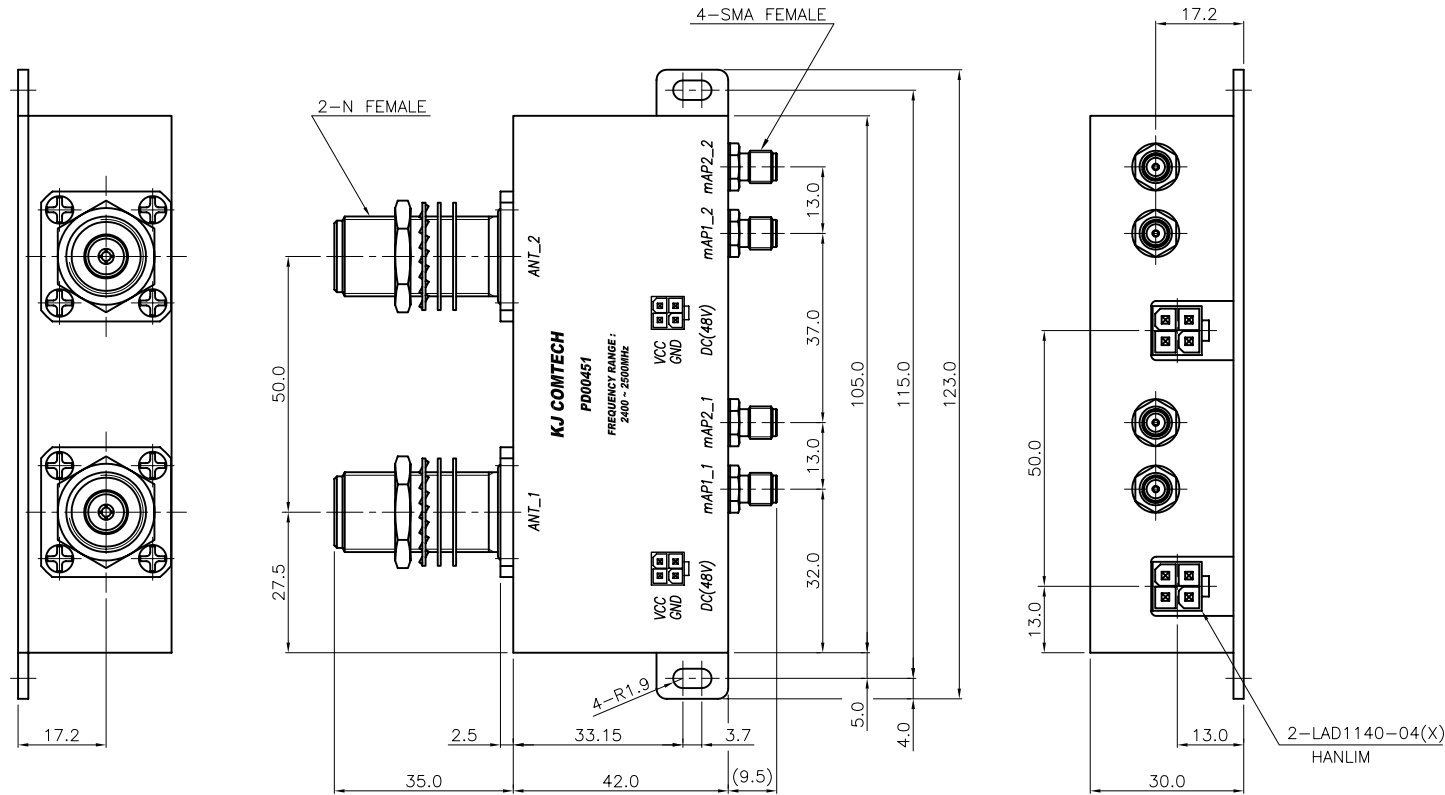

- * ELECTRICAL SPECIFICATIONS**
Frequency Range : 2400.0 ~ 2500.0MHz
Insertion Loss (Max.) : 3.5dB
(ANT_1 - mAP1_1 or mAP2_1),
(ANT_2 - mAP1_2 or mAP2_2)
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 39.0dB
(mAP1_1 - mAP2_1),
(mAP1_2 - mAP2_2)
Power Handling (Max.) : 1.0W
Input DC Voltage (Max.) : 48.0V
Input DC Current (Max.) : 3.0A
Impedance : 50.0Ω
- * MECHANICAL SPECIFICATIONS**
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON
- * OTHER SPECIFICATIONS**
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE	2010. 09. 13.
	Angle	APPROVED BY	J.H.YOUN
MATERIAL	±0.3	CHECKED BY	
	±1°	DRAWN BY	K.I.CHO
FINISH	A6061 T6	SCALE	1/1
White Chromate+해아라인		UNIT	mm
		TITLE	
		2WAY POWER DIVIDER + BIAS TEE	
		DWG NO. PD00451-7/1	
		REVISION I R SHEET 1 of 1	

KJ COMTECH
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017