
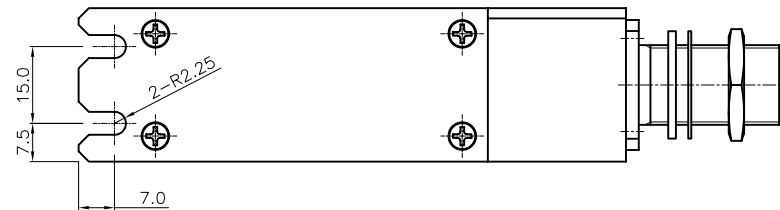
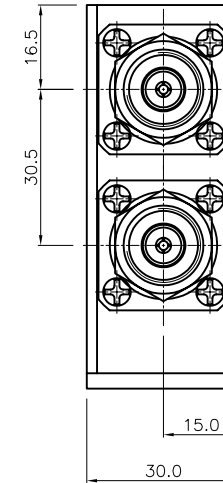
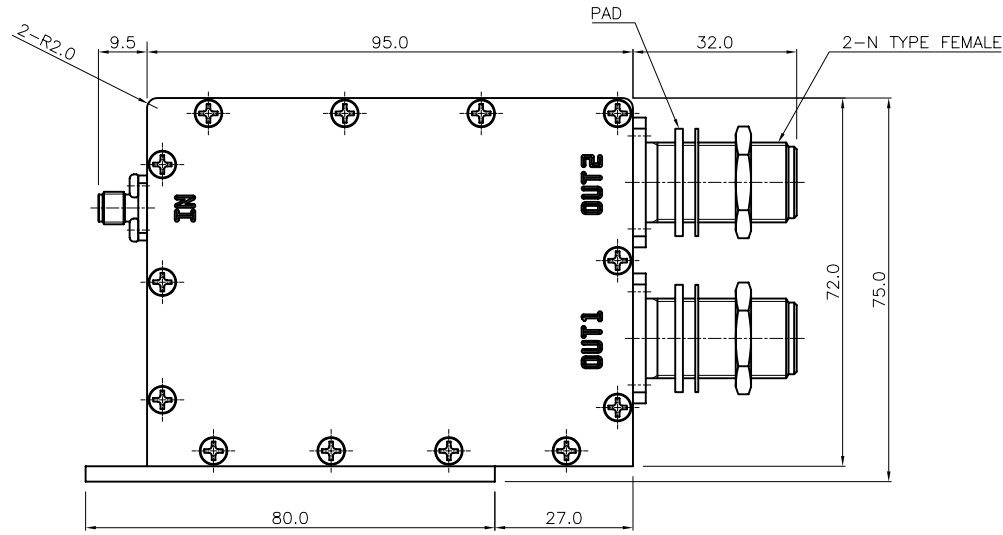


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	K.I.CHO	J.H.YOUN	2011.06.08.

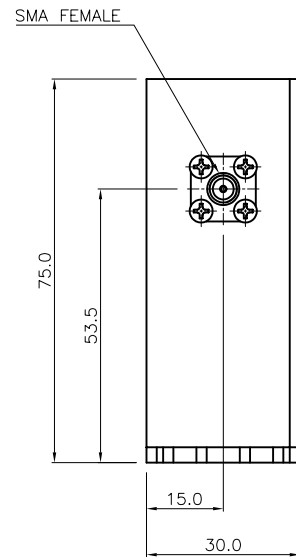

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 300.0~2200.0MHz
 Insertion Loss (Max.) : 3.9dB
 Return Loss(Min.) : 18.0dB
 Isolation(Min.) : 20.0dB
 Input Power(Max.) : 1.0W
 Operation Temperature : -30~+70℃

* MECHANICAL SPECIFICATIONS
 Housing : A6061 T6 (White Chromate)
 SMA Connector : Ni Plate
 N type Connector : Ni Plate

TOLERANCE	Decimal ±0.3	DATE	2011. 06. 08.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	DWG NO. PD00464-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	