
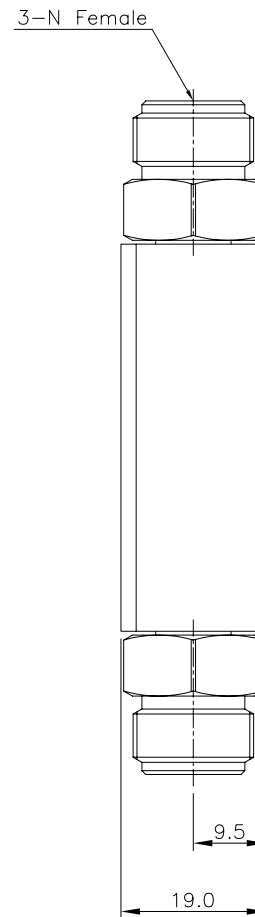


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2011.09.19.

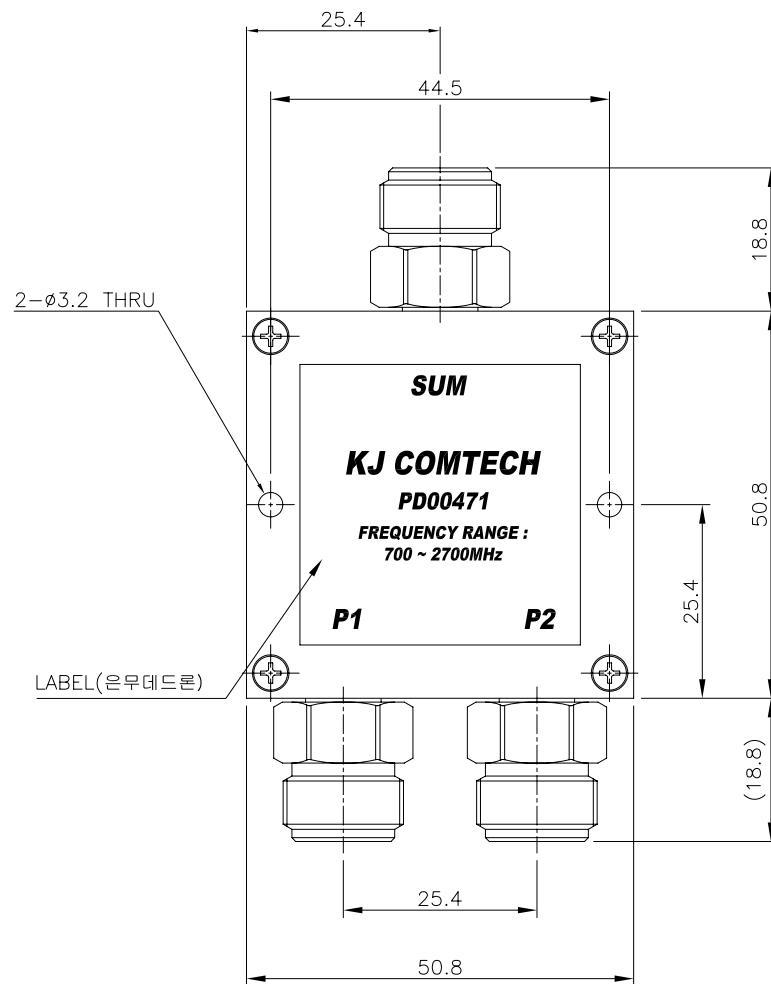

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 700.0 ~ 2700.0MHz

Insertion Loss (Max.) : 3.5 dB

V.S.W.R (Max.) : 1.3:1

Isolation (Min.) : 20.0dB

Power Handling (Max.) : 1.0W

Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2011. 09. 19.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY	I.C.KIM	TITLE 2WAY POWER DIVIDER
	A6061 T6	DRAWN BY	J.H.YOUN	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00471-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	