
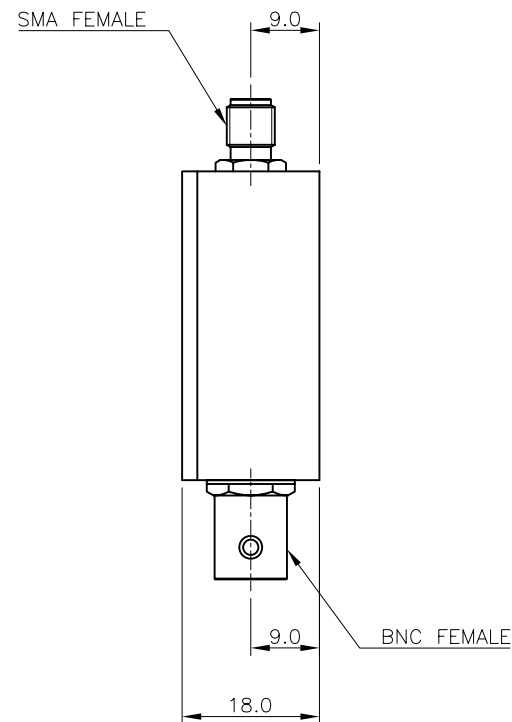


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2012.03.22.

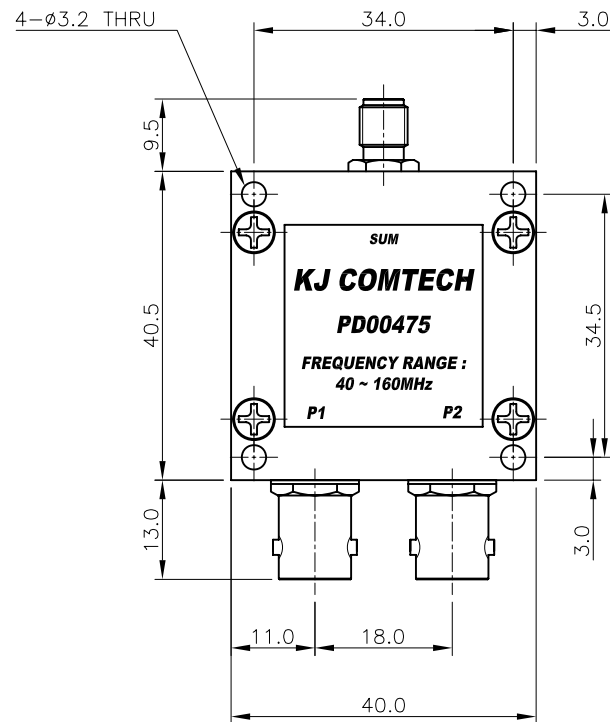

* ELECTRICAL SPECIFICATIONS
 FREQUENCY RANGE : 40~160MHz
 ISOLATION : 20dB MIN
 INSERTION LOSS : 4.0dB MAX (분배손실 포함)
 V.S.W.R : 1.20 : 1 MAX
 IMPEDANCE : 50.0Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

* OTHER SPECIFICATIONS
 MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2012. 3. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	I.C.KIM	TITLE 2WAY POWER DIVIDER
		DRAWN BY	J.H.YOUN	
FINISH White Chromate		SCALE	1/1	DWG NO. PD00475-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4