



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2012.04.09.

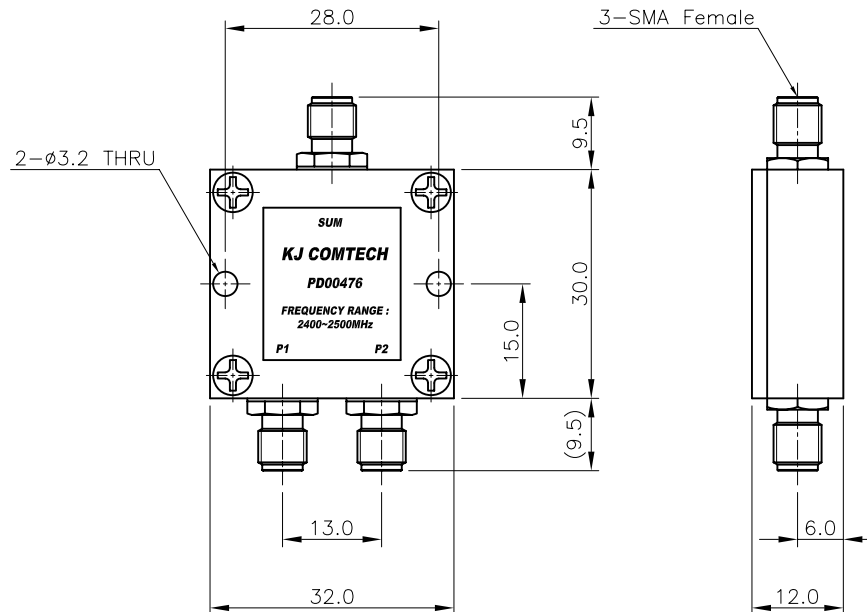

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2400~2500 MHz
Insertion Loss (Max.) : 3.3dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE 2012. 04. 09.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL	±1°	CHECKED BY	I.C.KIM			
	A6061 T6	DRAWN BY	J.H.YOUN			
FINISH	White Chromate	SCALE	UNIT	 A4		
		1/1	mm			
				DWG NO. PD00476-7/1		
				REVISION 1 SHEET 1 of 1		