


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2014.01.08.

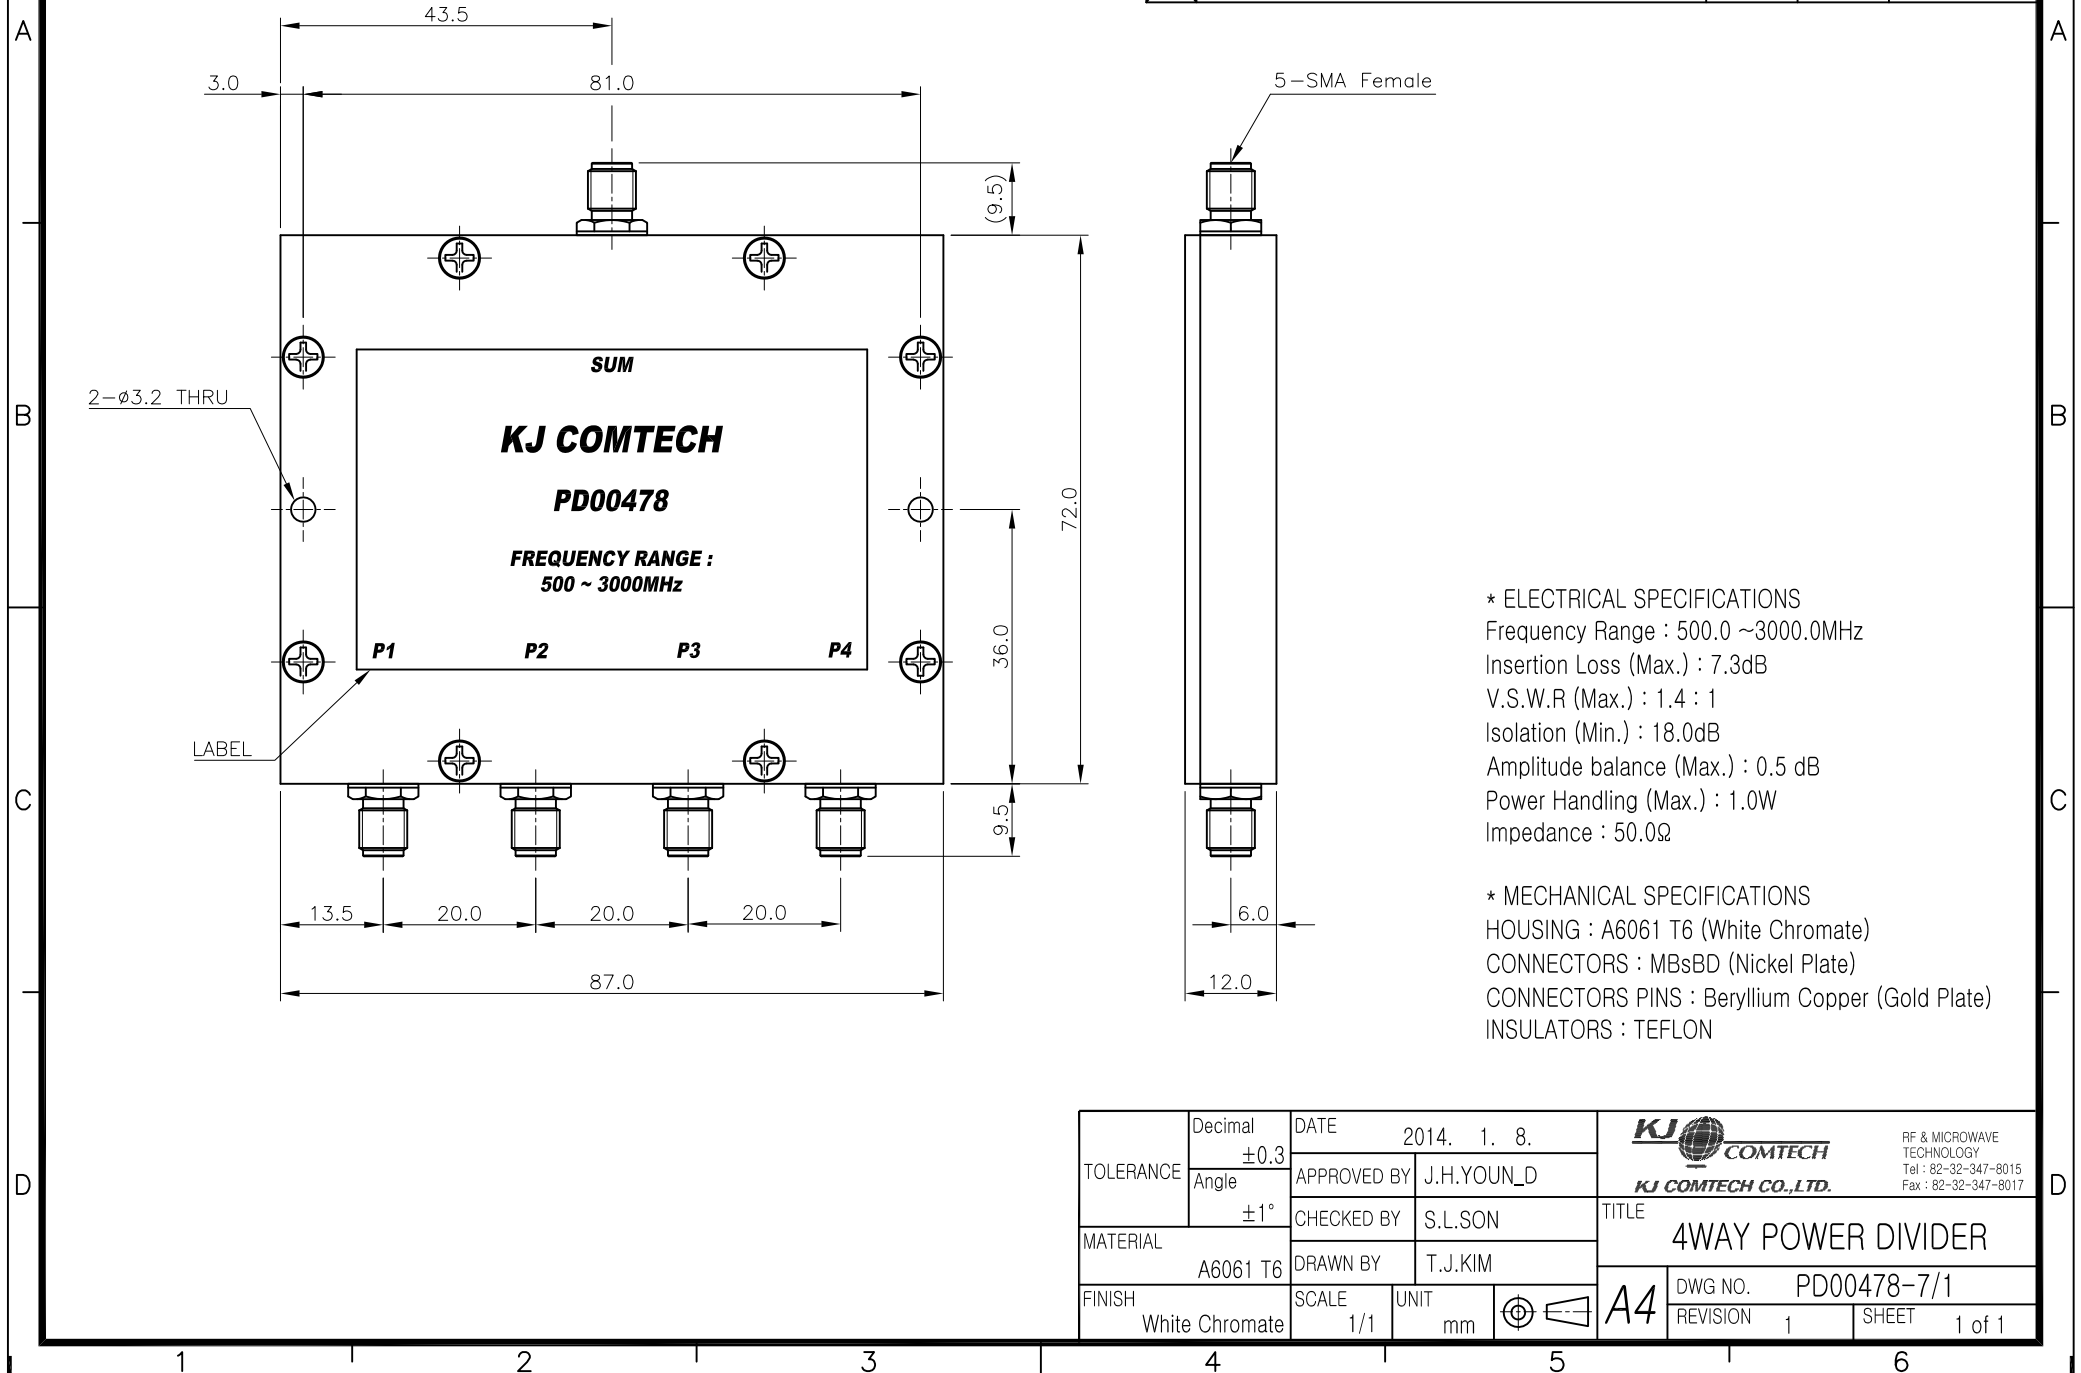

* ELECTRICAL SPECIFICATIONS

Frequency Range : 500.0 ~3000.0MHz

Insertion Loss (Max.) : 7.3dB

V.S.W.R (Max.) : 1.4 : 1

Isolation (Min.) : 18.0dB

Amplitude balance (Max.) : 0.5 dB

Power Handling (Max.) : 1.0W

Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2014. 1. 8.			
	Angle	APPROVED BY		TITLE	
	±1°	J.H.YOUN_D			
MATERIAL	A6061 T6	CHECKED BY		4WAY POWER DIVIDER	
		S.L.SON			
FINISH	White Chromate	DRAWN BY		A4	
		T.J.KIM			
		SCALE	UNIT		
		1/1	mm		
				DWG NO. PD00478-7/1	
				REVISION 1	SHEET 1 of 1