


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2013.04.30.

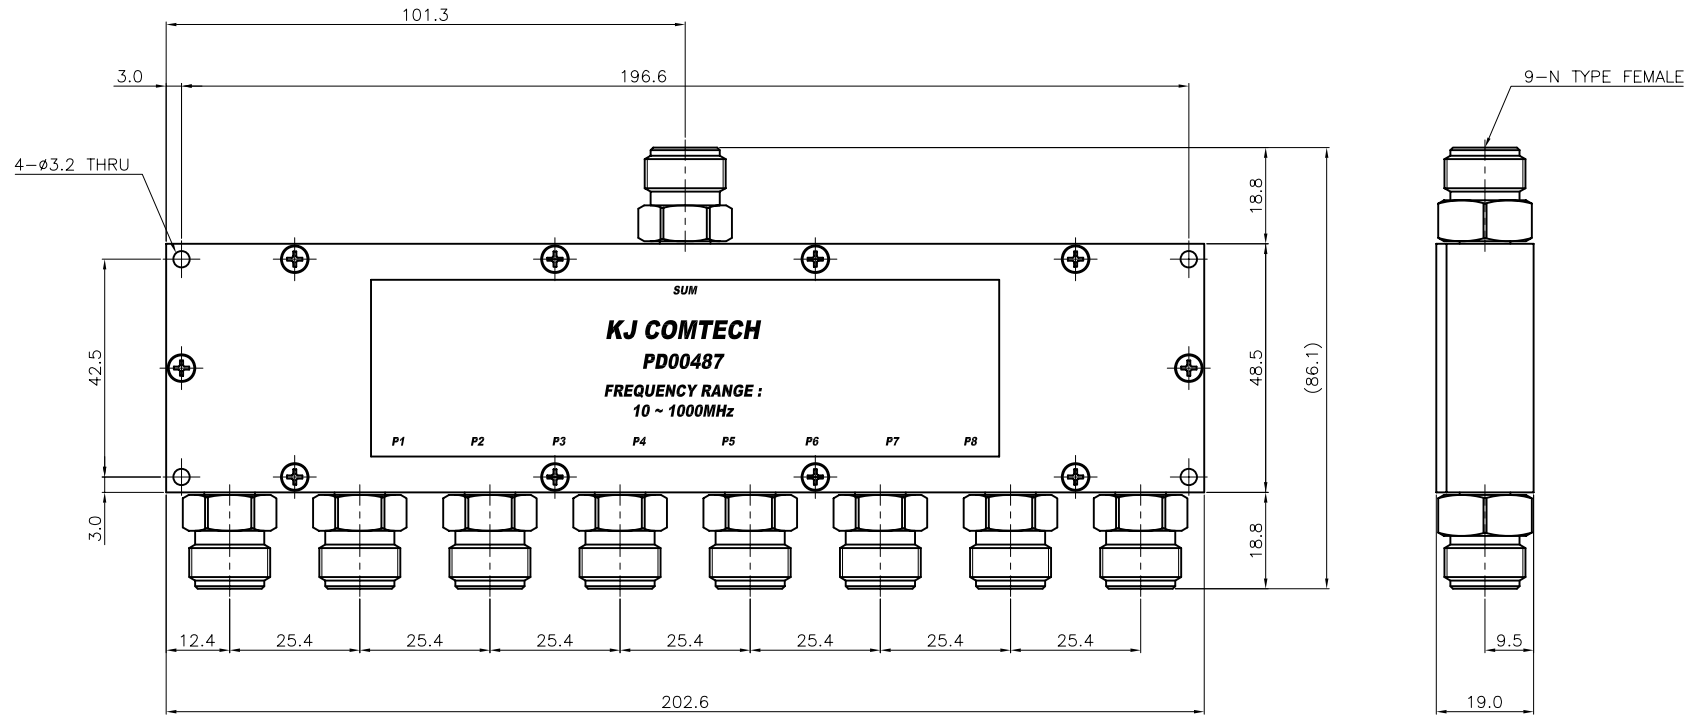

* ELECTRICAL SPECIFICATIONS
 FREQUENCY RANGE : 10~1000MHz
 INSERTION LOSS : 11.50dB MAX
 (분배손실 포함)
 V.S.W.R : 1.30 : 1 MAX
 ISOLATION : 18dB MIN
 INPUT POWER : 1W MAX
 OPERATION TEMPERATURE : -30~+70°C

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2013. 04. 30.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN	
MATERIAL A6061 T6	CHECKED BY S.L.SON	TITLE 8WAY POWER DIVIDER	
	DRAWN BY J.H.YOUN		
FINISH White Chromate	SCALE 1/1	UNIT mm	
	A3		
DWG NO. PD00487-7/1			
REVISION 1		SHEET 1 of 1	