




REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2013.07.29.
2	도장 및 실크인쇄 추가 및 모서리부분 면취처리	S.L.SON	J.H.YOUN	2013.08.20.

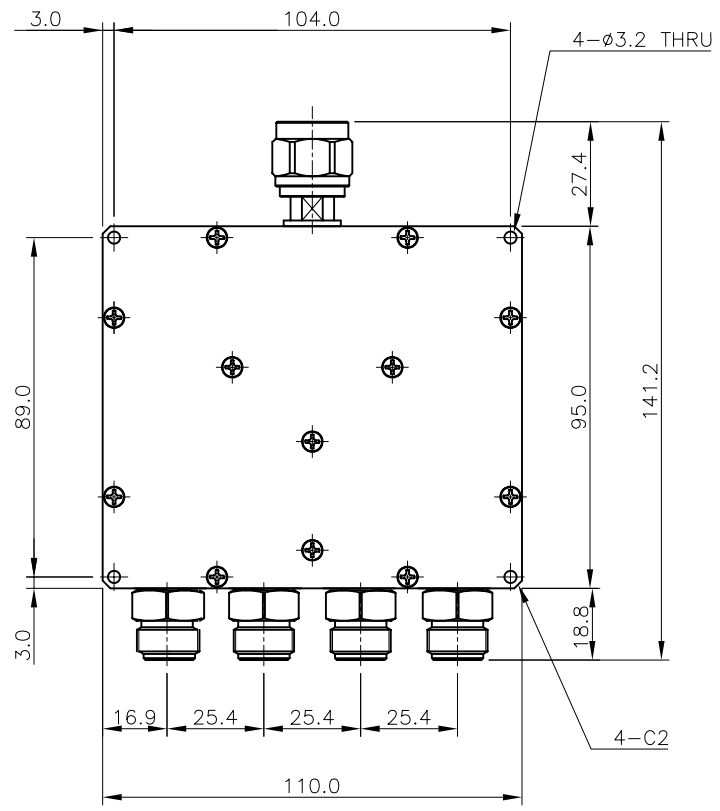

FRONT

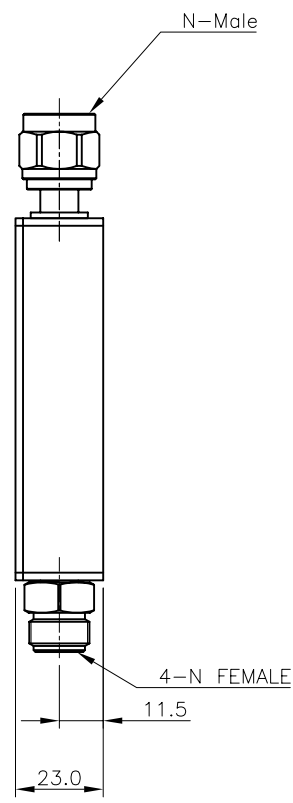

SIDE

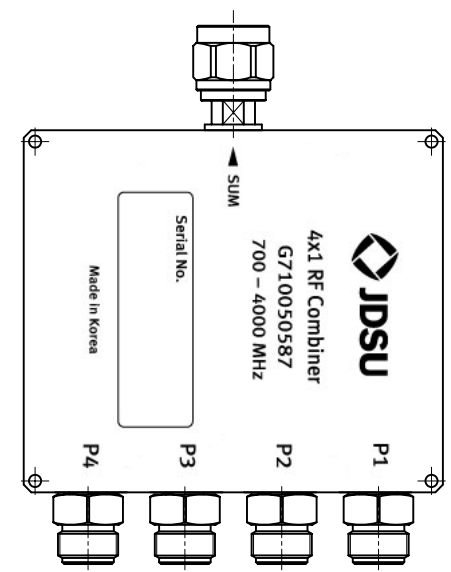

BACK

인쇄 작업시 필히 제품의 나사 장착부가
없는 뒷면에 인쇄 작업할 것.

* ELECTRICAL SPECIFICATIONS
Frequency Range : 680~4000 MHz
Insertion Loss (Max.) : 7.0dB
V.S.W.R (Max.) : 1.5 : 1
Isolation (Min.) : 15.0dB
Amplitude Balance (Max) : 0.5dB
Phase Balance (Max) : 4°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Pantone cool gray No.4 , With Texture)
색상견본 
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2013. 08. 20.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	TITLE 4WAY POWER COMBINER
		DRAWN BY	S.L.SON	
FINISH	Spray Paint width smooth texture. Pantone cool gray No.4	SCALE	1/2	DWG NO. PD00489-8/2 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4