
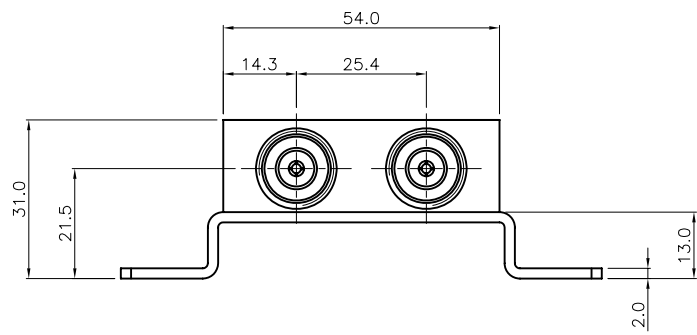


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2013.08.21.

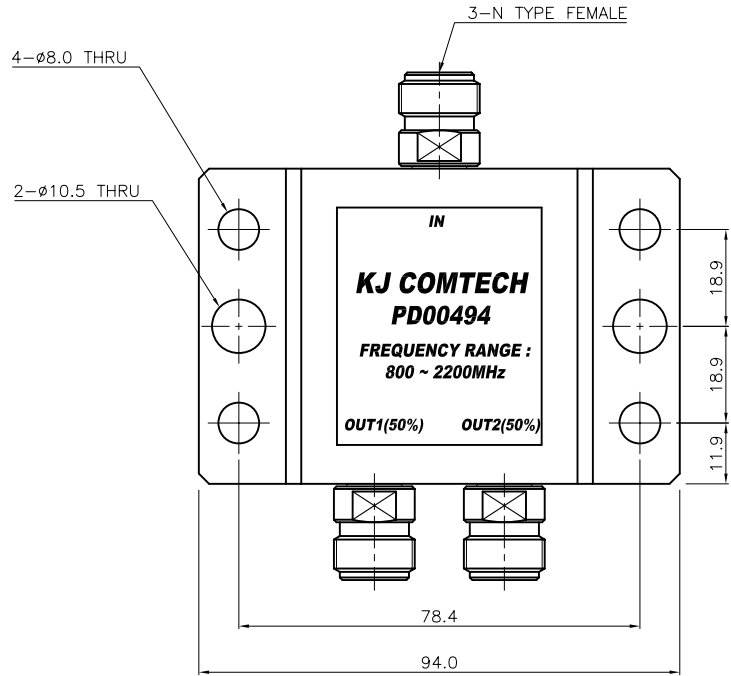

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 800.0 ~ 2200.0MHz
 Insertion Loss (Max.) : 3.5dB
 5dB(@10~30MHz)
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 18.0dB
 Input Power (Max.) : Forward 100.0W
 DC Power Capability(Max.) : Voltage 27V
 Current 6A
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Ni Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2013. 08. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN		TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON		
FINISH	White Chromate	SCALE	UNIT		A3
		1/1	mm		
		DWG NO.	PD00494-7/1		
		REVISION	1	SHEET 1 of 1	