
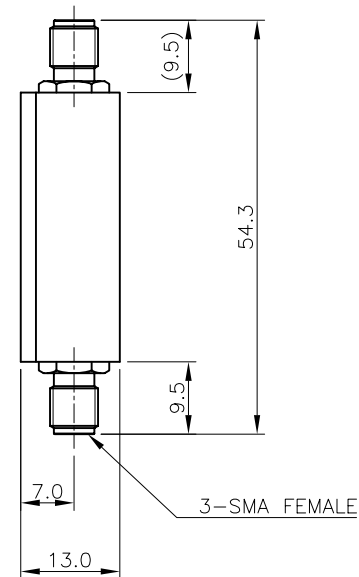


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2013.08.28.

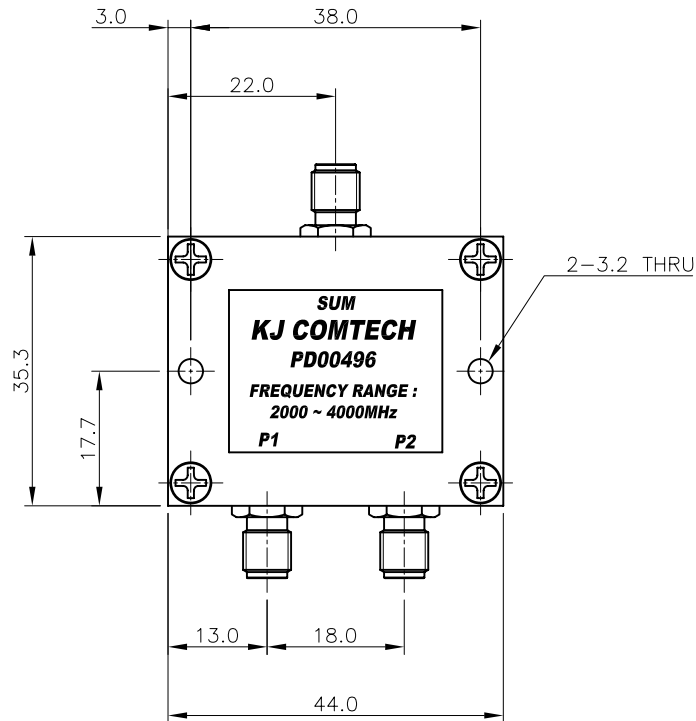

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2000 ~ 4000MHz
Insertion Loss (Max.) : 3.4dB
V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS :
Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE 2013. 08. 28.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	$\pm 1^\circ$	CHECKED BY	J.H.YOUN	KJ COMTECH CO.,LTD. TITLE 2WAY POWER DIVIDER
	A6061 T6	DRAWN BY	S.L.SON	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00496-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	