
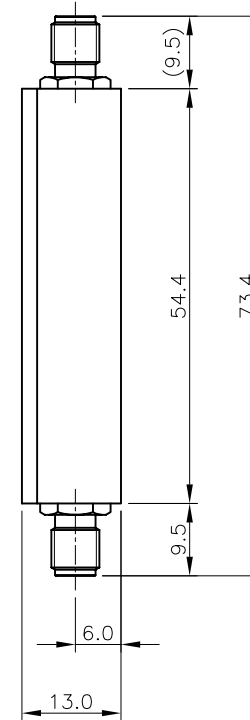


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.03.14.

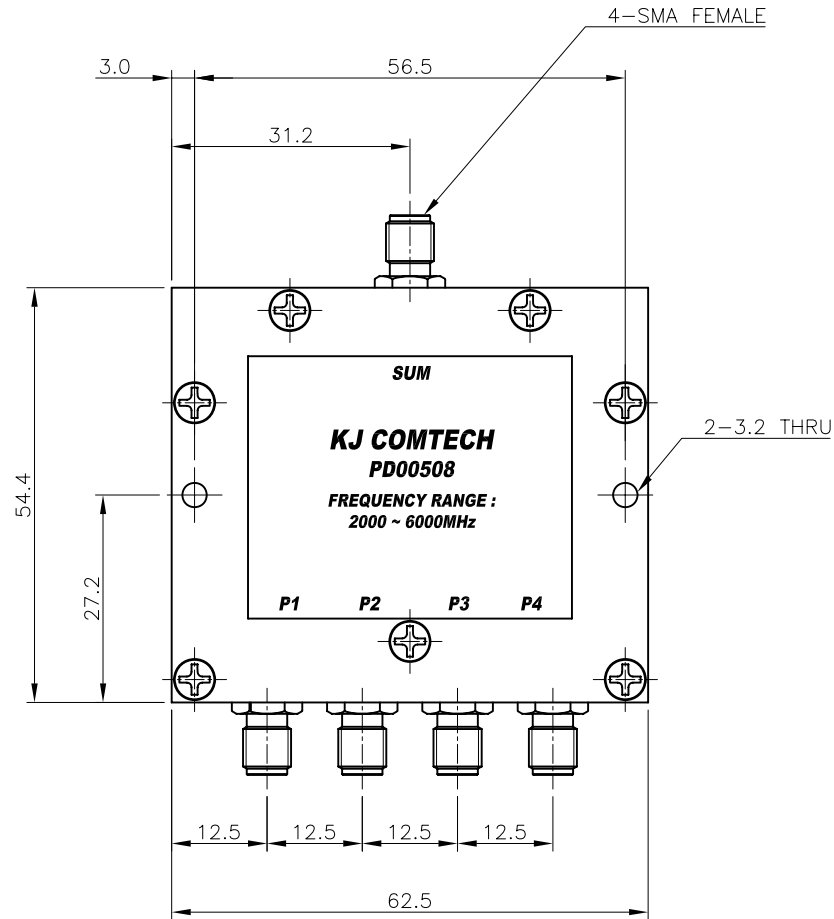

- * ELECTRICAL SPECIFICATIONS
Frequency Range : 2000 ~ 6000MHz
Insertion Loss (Max.) : 7.5dB
V.S.W.R (Max.) : 1.4 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0 Ω
- * MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS :
Beryllium Copper (Gold Plate)
INSULATORS : TEFLON
- * OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE 2014. 03. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. TITLE 4WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00508-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	