



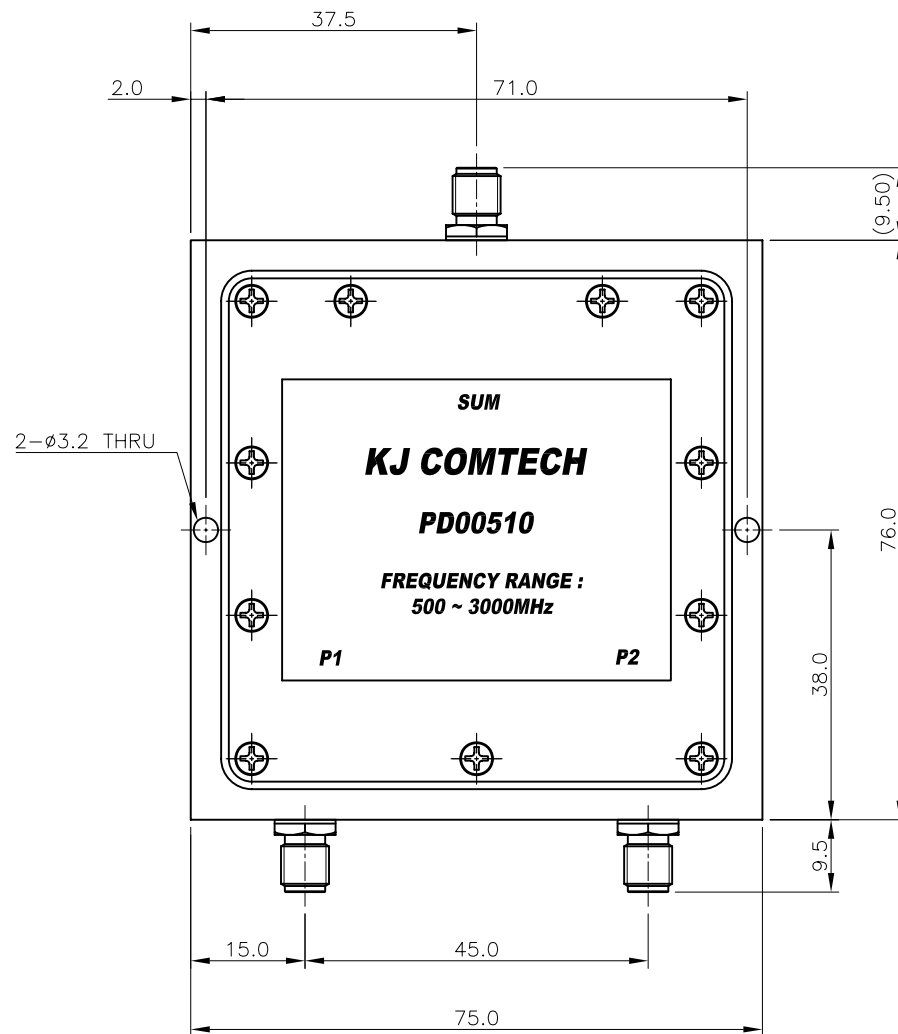

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.04.14.

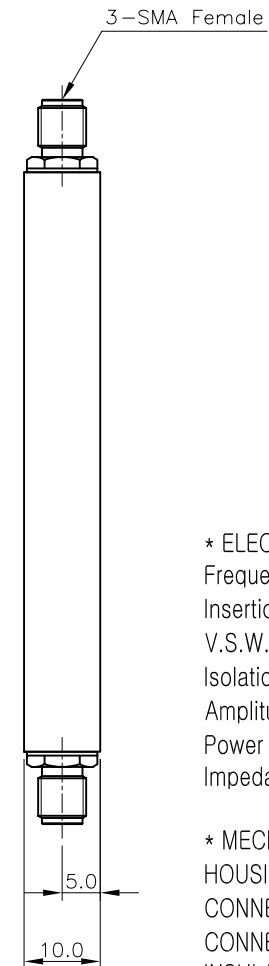

* ELECTRICAL SPECIFICATIONS

Frequency Range : 500.0 ~3000.0MHz
 Insertion Loss (Max.) : 0.9dB (6.1dB분배손실 미포함)
 V.S.W.R (Max.) : 1.5 : 1
 Isolation (Min.) : 16.0dB
 Amplitude balance (Max.) : 0.5 dB
 Power Handling (Max.) : 1.0W
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE
	Angle	2014. 04. 14.				
	APPROVED BY			J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY			KJ COMTECH CO.,LTD.	2WAY POWER DIVIDER
		T.J.KIM				
FINISH	White Chromate	DRAWN BY		S.L.SON	A4	DWG NO. PD00510-7/1
		SCALE	UNIT			
		1/1	mm			