
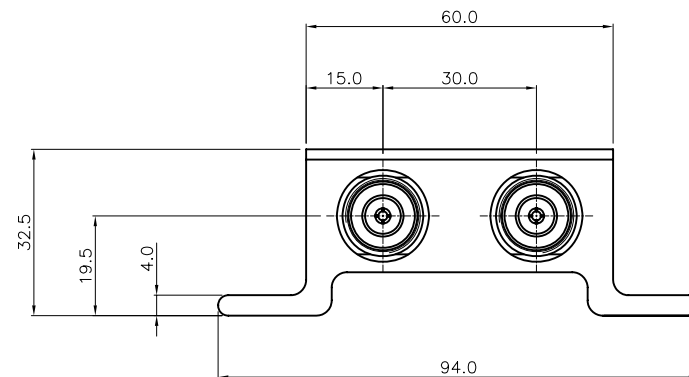


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2015.10.14.

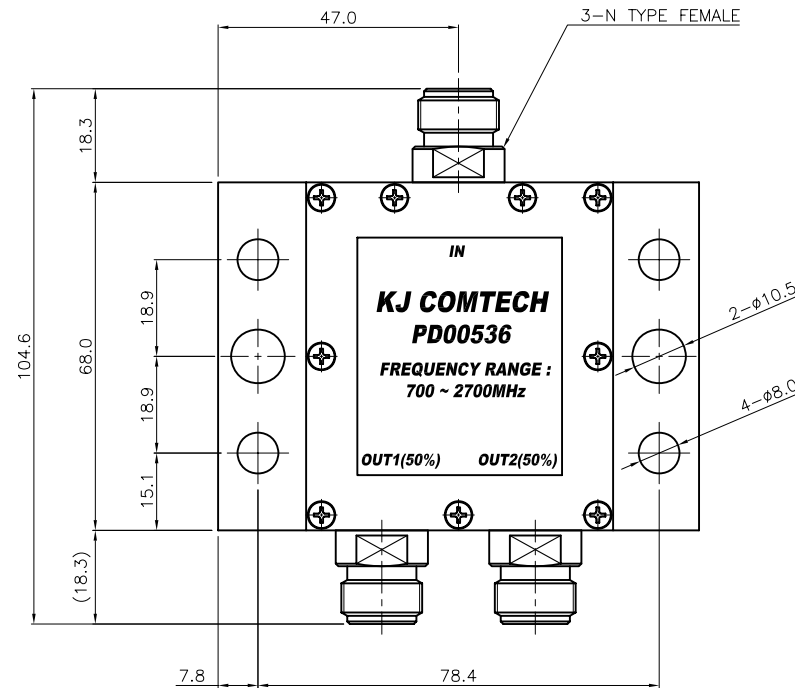

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~2700 MHz
Division Ratio : 1:1
Insertion Loss (Max.) : 3.5dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Input Power (Max.) : 10.0W
Impedance : 50.0 Ω
PIMD(Max.) : -150dBc
(@37dBm 2 Tone,CDMA,WCDMA)

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Liquid Coating, DIC-547)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
-40~+70°C (5%~95%)
IP65

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal ± 0.3	DATE 2015. 10. 14.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY J.H.YOUN	
MATERIAL A6061 T6	DRAWN BY T.J.KIM	CHECKED BY S.L.SON	TITLE 2WAY POWER DIVIDER
		SCALE 1/1	
FINISH Liquid Coating(DIC-547)	UNIT mm		DWG NO. PD00536-6/1 REVISION 1 SHEET 1 of 1