


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2015.01.07.

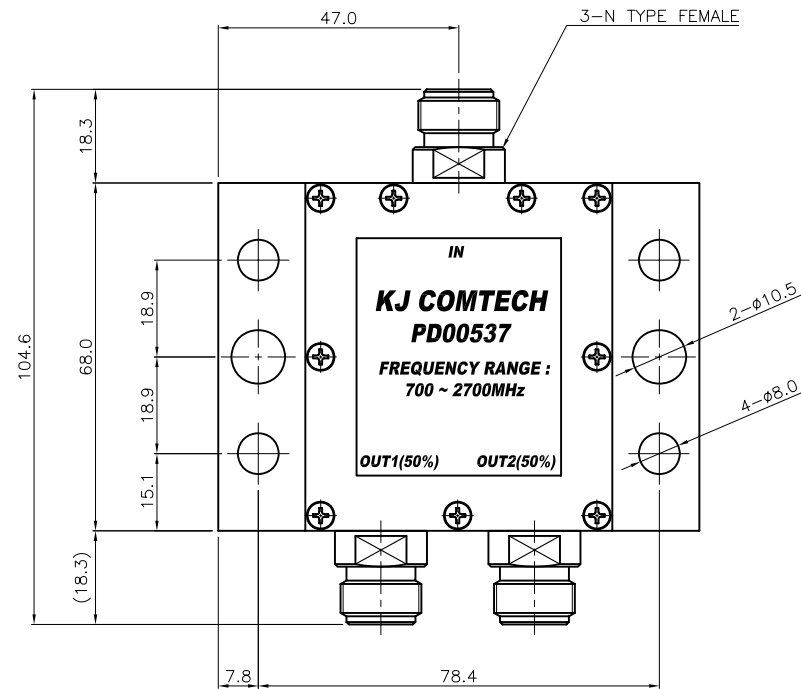


* ELECTRICAL SPECIFICATIONS
 Frequency Range : 700~2700 MHz
 Division Ratio : 1:1
 Insertion Loss (Max.) : 3.5dB
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Input Power (Max.) : 50.0W
 Impedance : 50.0 Ω
 PIMD(Max.) : -150dBc
 (@43dBm 2 Tone,CDMA,WCDMA)

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Liquid Coating, DIC-547)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
 -40~+70°C (5%~95%)
 IP65

* OTHER SPECIFICATIONS
 MARKING COLOR : BLACK

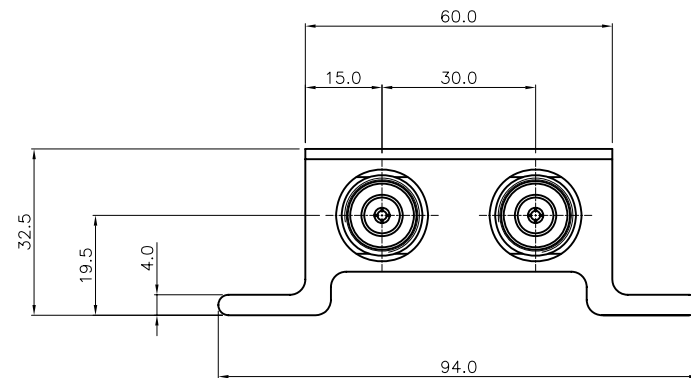

TOLERANCE	Decimal ±0.3	DATE 2015. 10. 14.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061 T6	FINISH Liquid Coating(DIC-547)	CHECKED BY S.L.SON	TITLE 2WAY POWER DIVIDER	
		DRAWN BY T.J.KIM		
SCALE 1/1		UNIT mm	A3 DWG NO. PD00537-6/1 REVISION 1 SHEET 1 of 1	
				