


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2016.01.20.

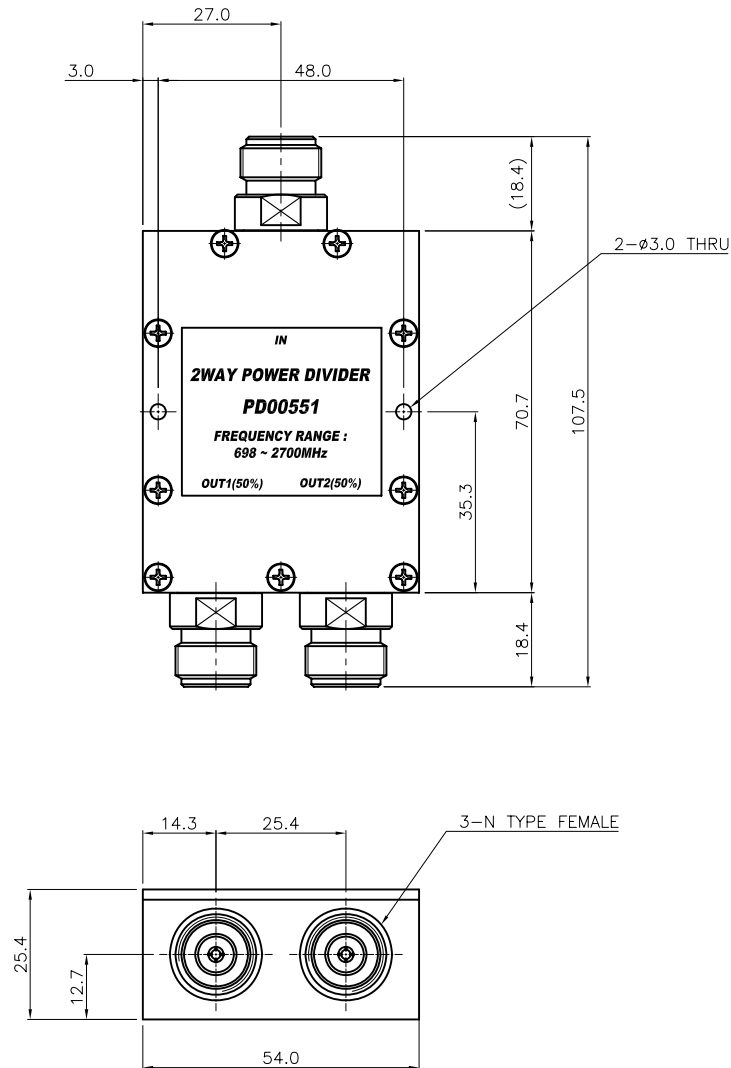

* ELECTRICAL SPECIFICATIONS
Frequency Range : 698~2700MHz
Insertion Loss (Max.) : 3.4dB
VSWR(Max.) : 1.25 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 10.0W
Impedance : 50Ω
Amplitude Balance(Max.) : 0.3dB

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper
(Gold Plate)
INSULATORS : TEFLON

*ENVIRONMENT SPECIFICATIONS
-30 ~ +60°C

TOLERANCE	Decimal ±0.3	DATE 2016. 01. 20.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY S.L.SON	TITLE 2WAY POWER DIVIDER	
		DRAWN BY T.J.KIM		
SCALE 1/1		UNIT mm	 A3	
			DWG NO. PD00551-7/1	
			REVISION 1	SHEET 1 of 1