


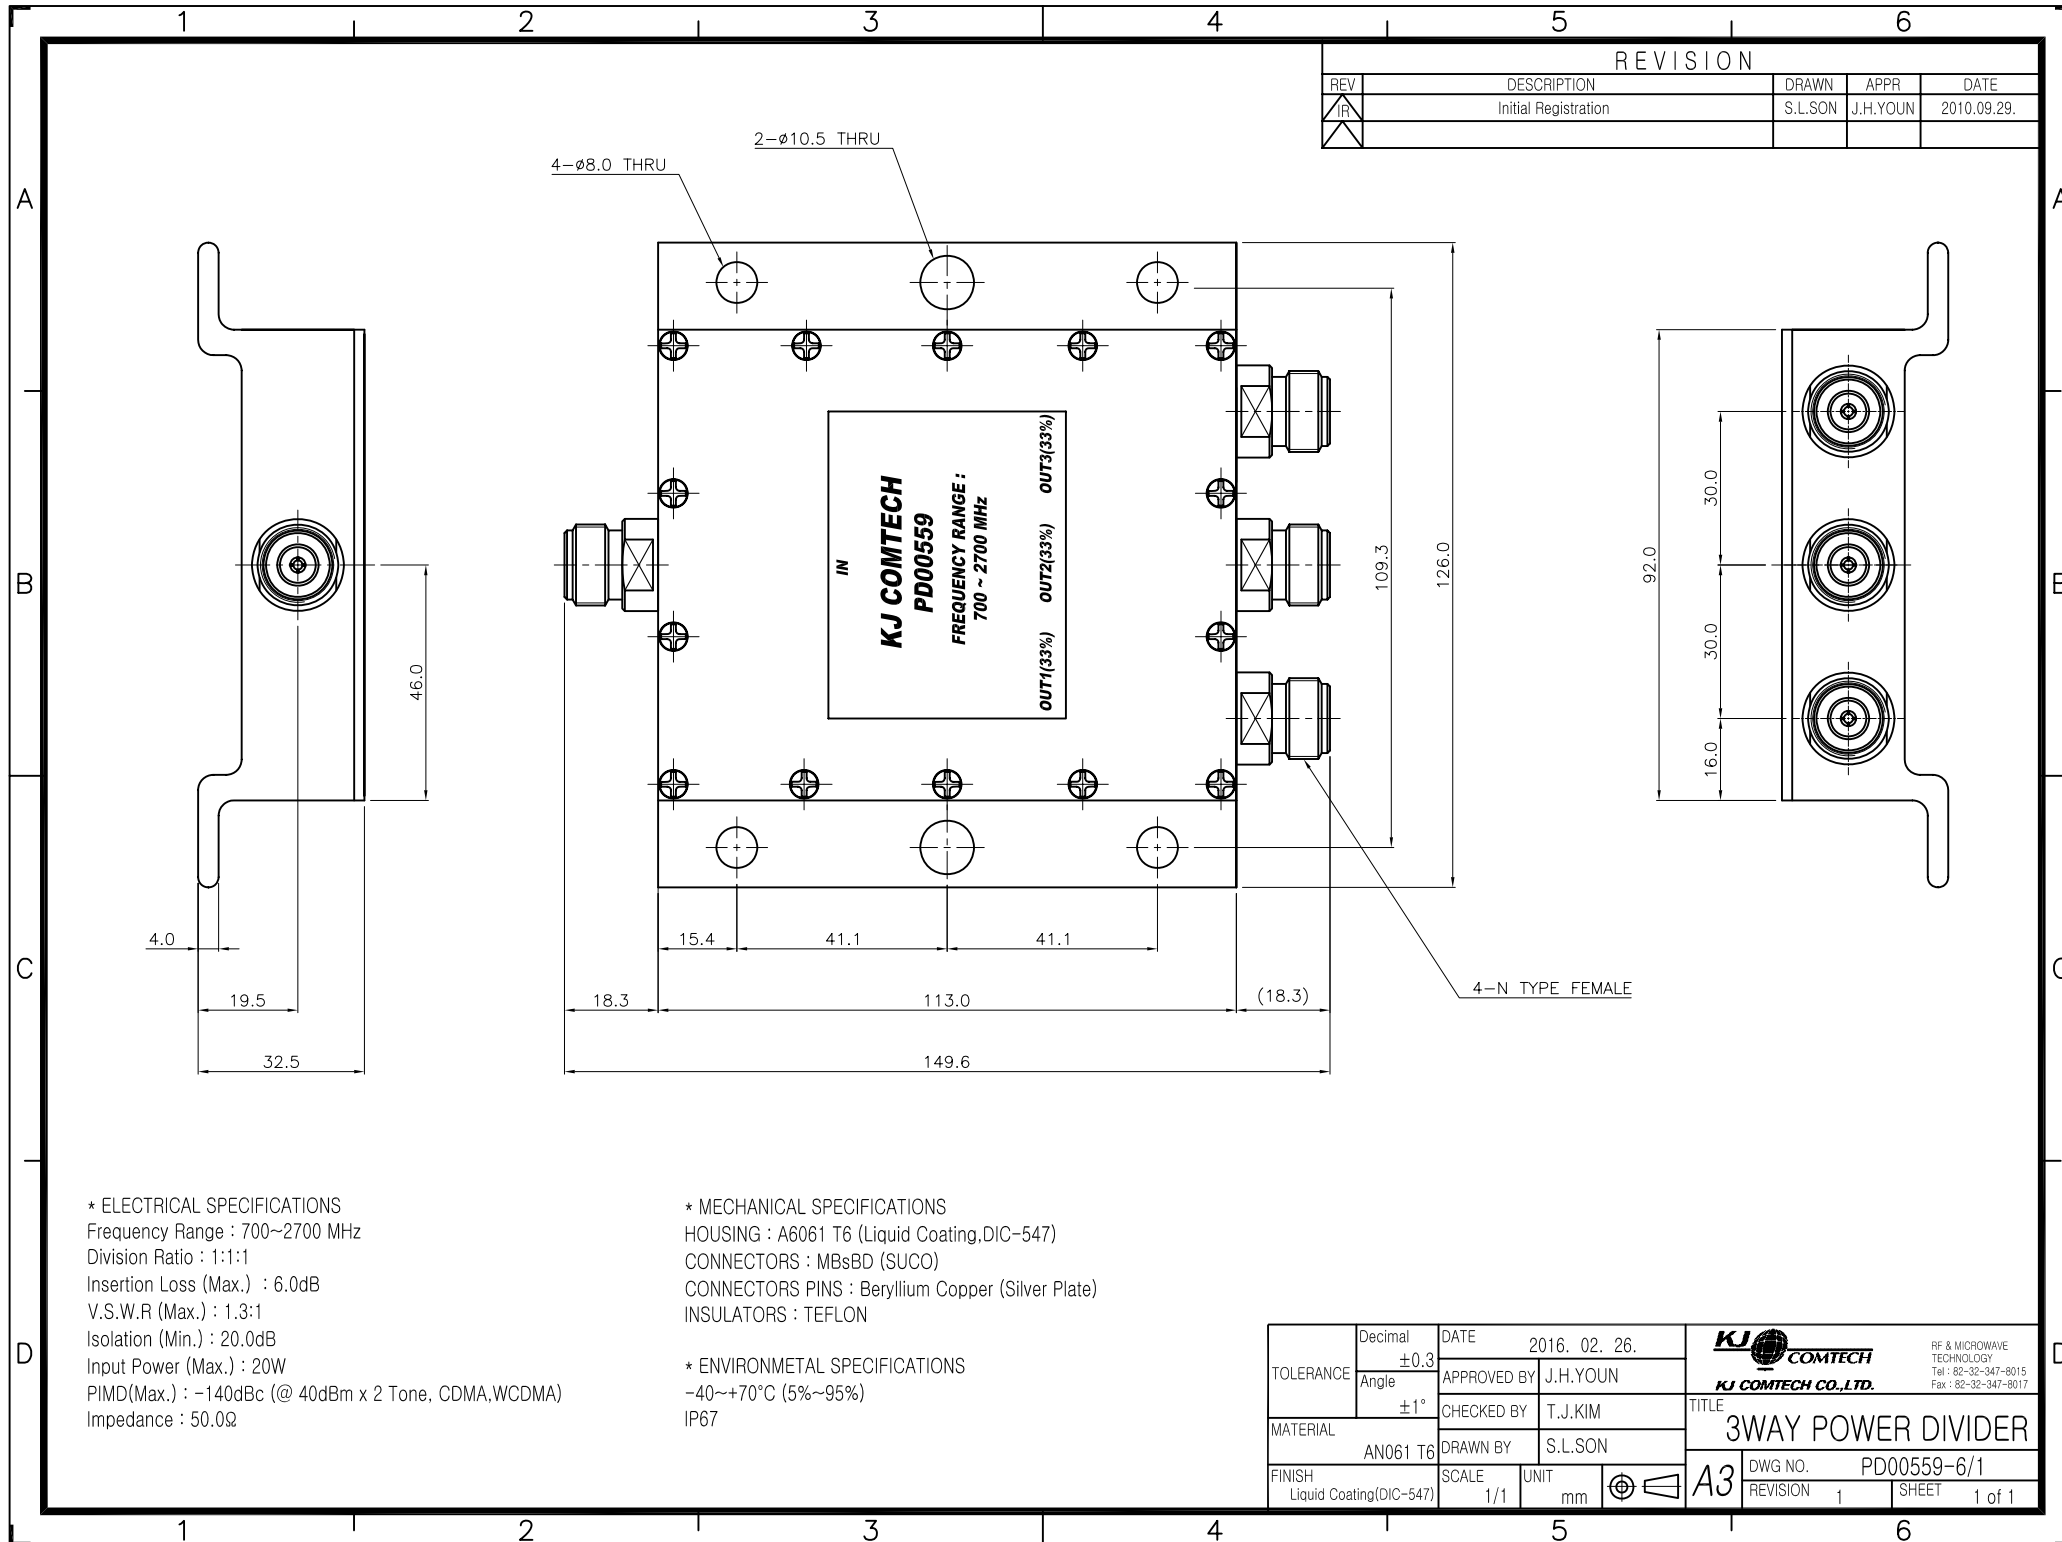

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.L.SON	J.H.YOUN	2010.09.29.

* ELECTRICAL SPECIFICATIONS

Frequency Range : 700~2700 MHz
 Division Ratio : 1:1:1
 Insertion Loss (Max.) : 6.0dB
 V.S.W.R (Max.) : 1.3:1
 Isolation (Min.) : 20.0dB
 Input Power (Max.) : 20W
 PIMD(Max.) : -140dBc (@ 40dBm x 2 Tone, CDMA,WCDMA)
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Liquid Coating,DIC-547)
 CONNECTORS : MBsBD (SUCCO)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS

-40~+70°C (5%~95%)
 IP67

TOLERANCE	Decimal	DATE	2016. 02. 26.
	Angle	APPROVED BY	J.H.YOUN
MATERIAL	AN061 T6	CHECKED BY	T.J.KIM
	Liquid Coating(DIC-547)	DRAWN BY	S.L.SON
FINISH	SCALE	UNIT	
	1/1	mm	

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO.,LTD.		TITLE 3WAY POWER DIVIDER	
DWG. NO. PD00559-6/1		SHEET 1 of 1	
REVISION 1		A3	