


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.08.14.
2	측정 주파수표 제거	K.S.KIM	S.L.SON	2021.07.07.

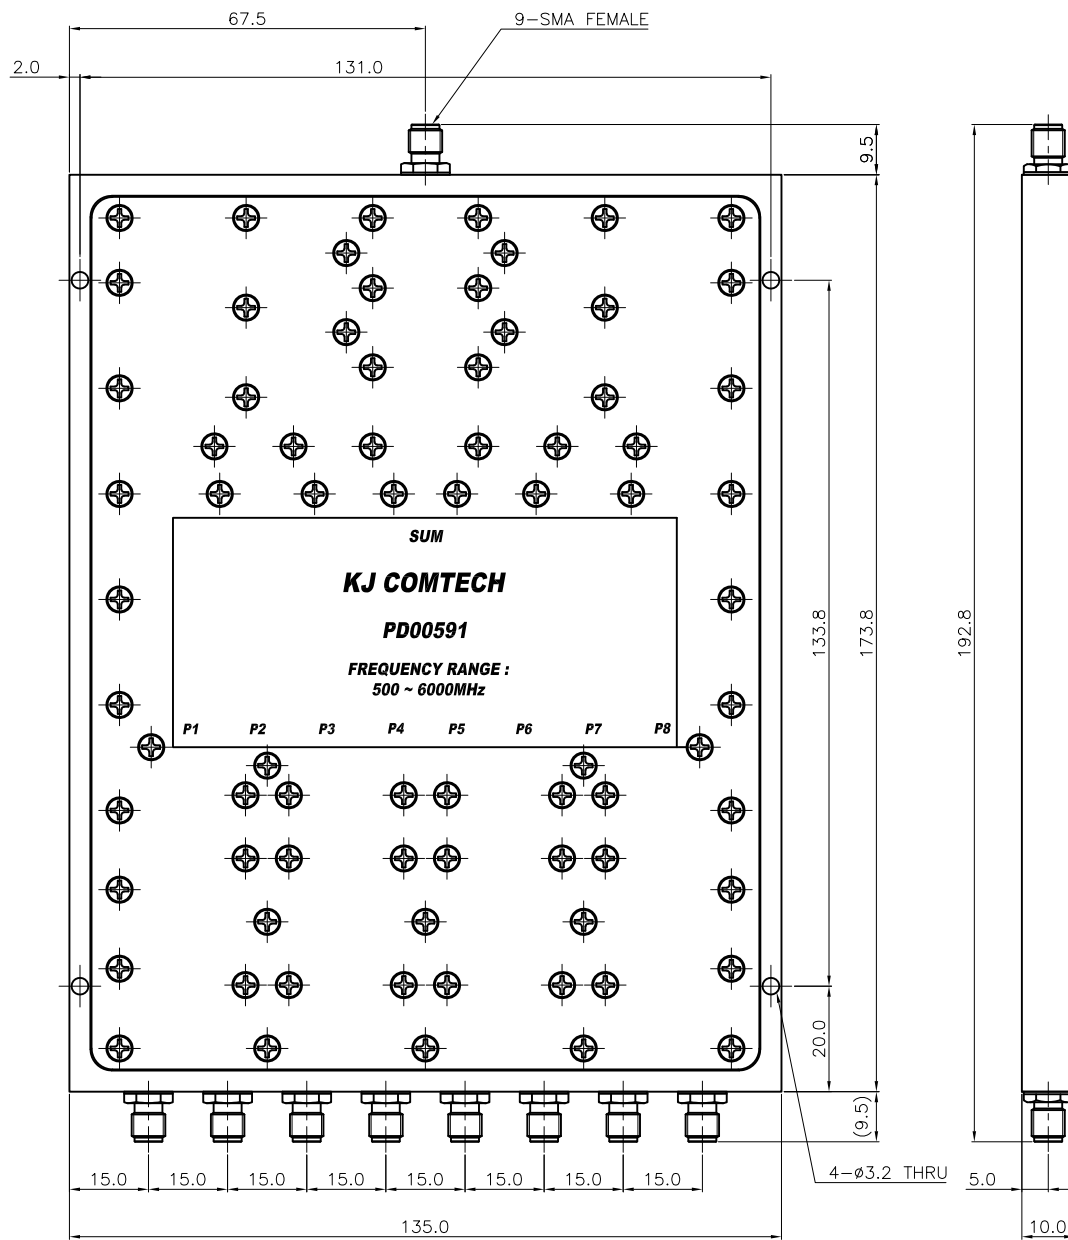

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 500.0 ~ 6000.0MHz
V.S.W.R (Max.) :
0500 ~ 3000MHz : 1.4:1
3000 ~ 6000MHz : 1.5:1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 4.0W
Impedance : 50.0Ω
Insertion Loss(Max.) : 11.3dB
Amplitude Unbalance:
0500 ~ 3000MHz : Ref. ± 0.2dB
3000 ~ 4000MHz : Ref. ± 0.3dB
4000 ~ 6000MHz : Ref. ± 0.5dB

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper
(Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2021. 07. 07.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	Angle ±1°	APPROVED BY S.L.SON					
	MATERIAL A6061	CHECKED BY S.L.SON	TITLE 8WAY POWER DIVIDER				
DRAWN BY K.S.KIM							
FINISH White Chromate		SCALE 1/1	UNIT mm		A3	DWG NO. PD00591-7/2	REVISION 2