
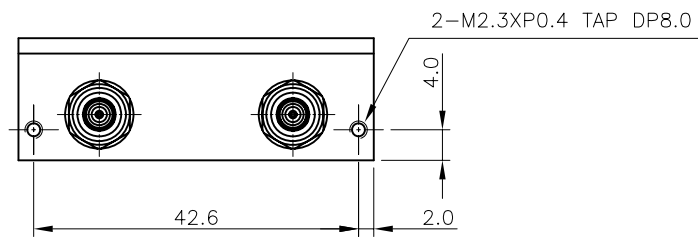
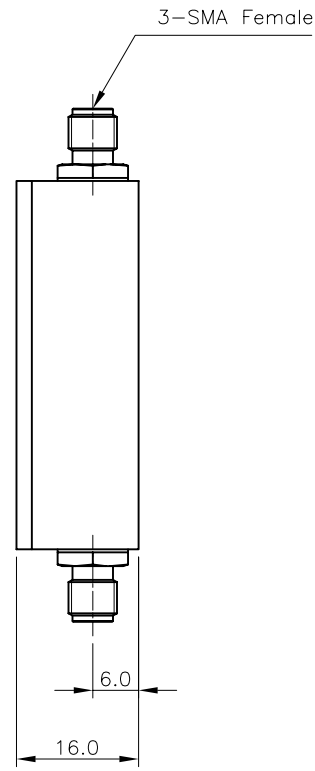


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2017.06.27.

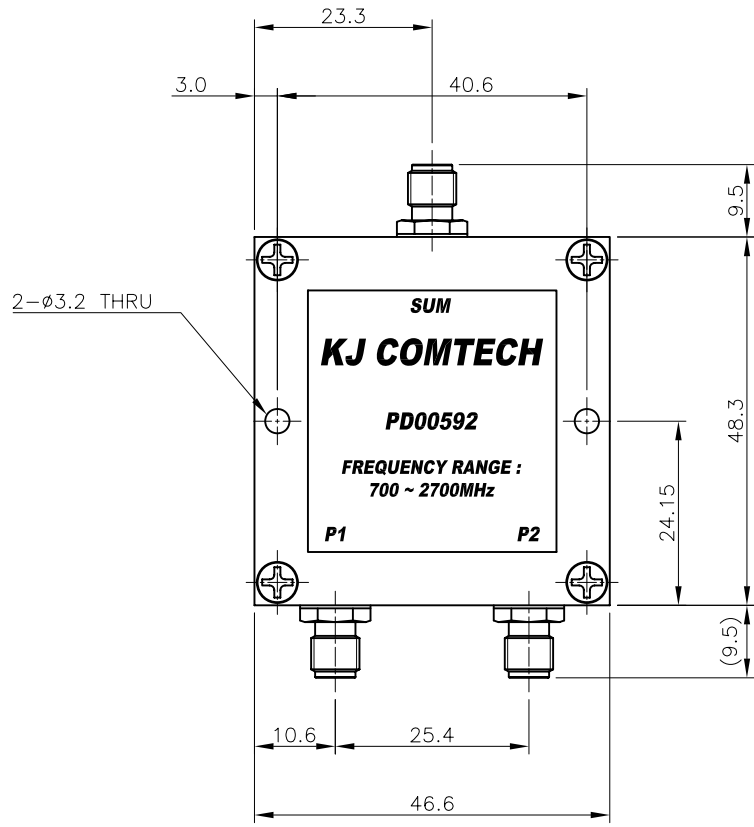

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700.0 ~ 2700.0MHz
Insertion Loss (Max.) : 3.5dB
V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2017. 06. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	KJ COMTECH CO.,LTD. TITLE 2WAY POWER DIVIDER
		DRAWN BY	T.J.KIM	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00592-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	