
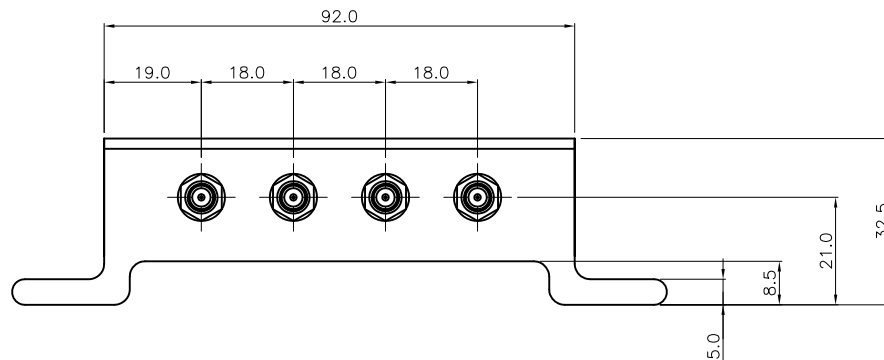


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.12.27.
2	Logo 변경	S.L.SON	J.H.YOUN	2018.12.17.

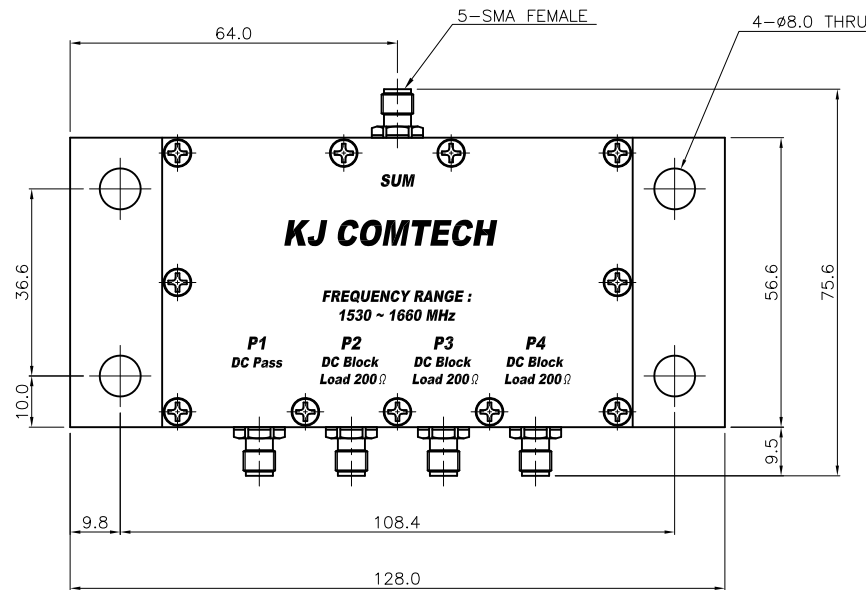

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1530~1660 MHz
Insertion Loss (Max.) : 6.5dB
Amplitude Unbalance (Max.): 0.3dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20dB
Power Handling (Max.) : 2.0W
DC Voltage (Max.) : 9V
DC Current (Max.) : 100mA
RF Impedance(@1530~1660MHz) : 50Ω
DC Load Resistance(@P2,P3,P4) : 200±5Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPEC
IP-65
Operating Temperature Range :
-40.0℃ ~ +80.0℃ / Up to 95%
RoHS Compliance

* ETC
Printing Color: BLACK

TOLERANCE	Decimal ±0.3	DATE 2018. 12. 17.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN	
MATERIAL A6061 T6	DRAWN BY S.L.SON	CHECKED BY	TITLE 4WAY POWER DIVIDER
		SCALE 1/1	
FINISH White Chromate	UNIT mm	DWG NO. PD00594-7/2	A3
		REVISION 2	
		SHEET 1 of 1	