


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2018.08.24.

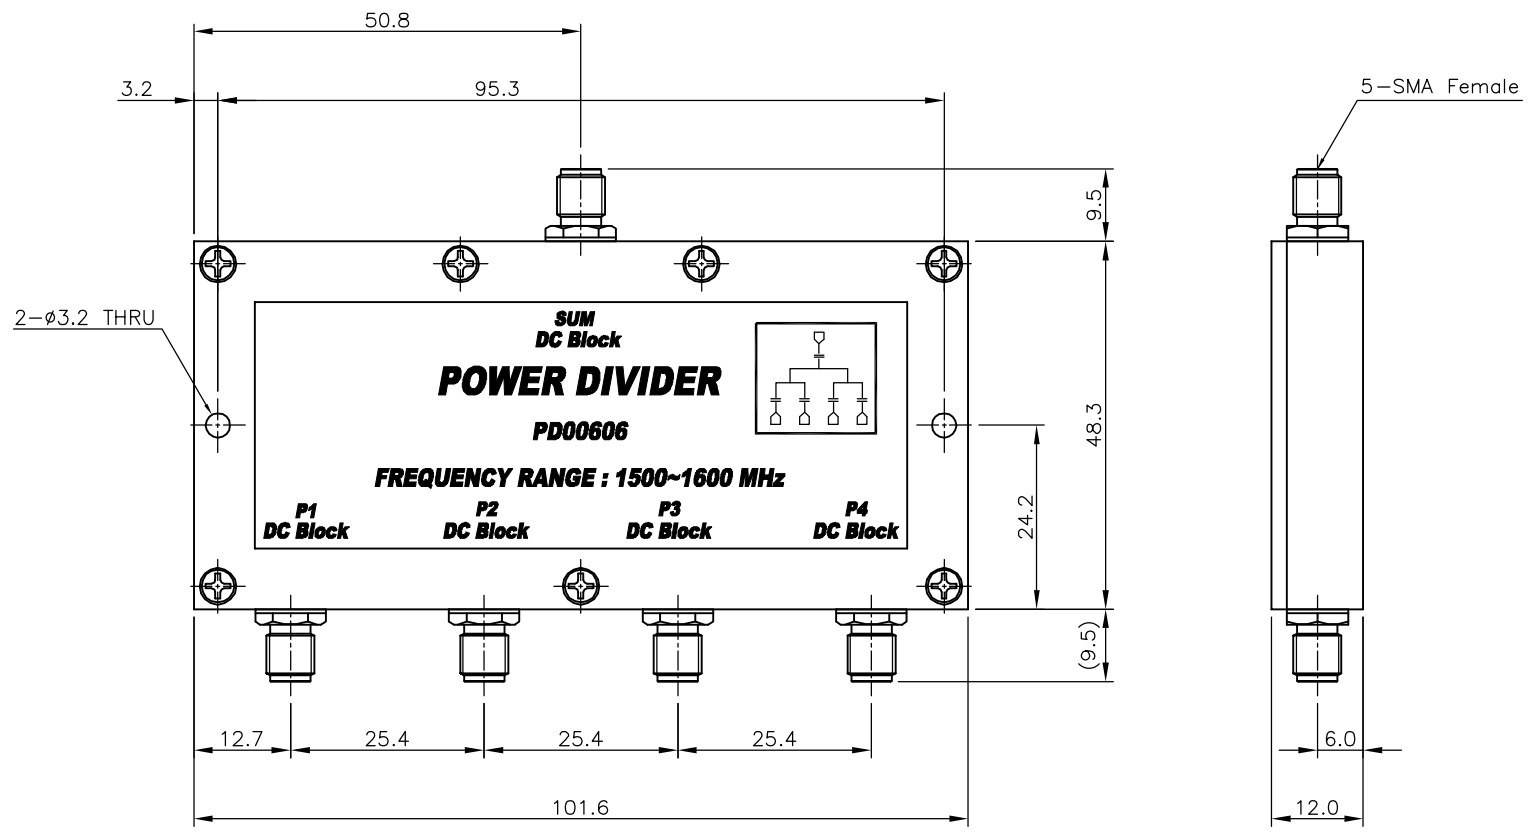

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1500.0 ~ 1600.0MHz
 Insertion Loss (Max.) : 6.7dB
 V.S.W.R (Max.) : 1.2:1
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2018. 8. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH White Chromate	SCALE 1/1	UNIT	mm	DWG NO. PD00606-7/1 REVISION 1 SHEET 1 of 1