


SMA Type 4Way Power Divider

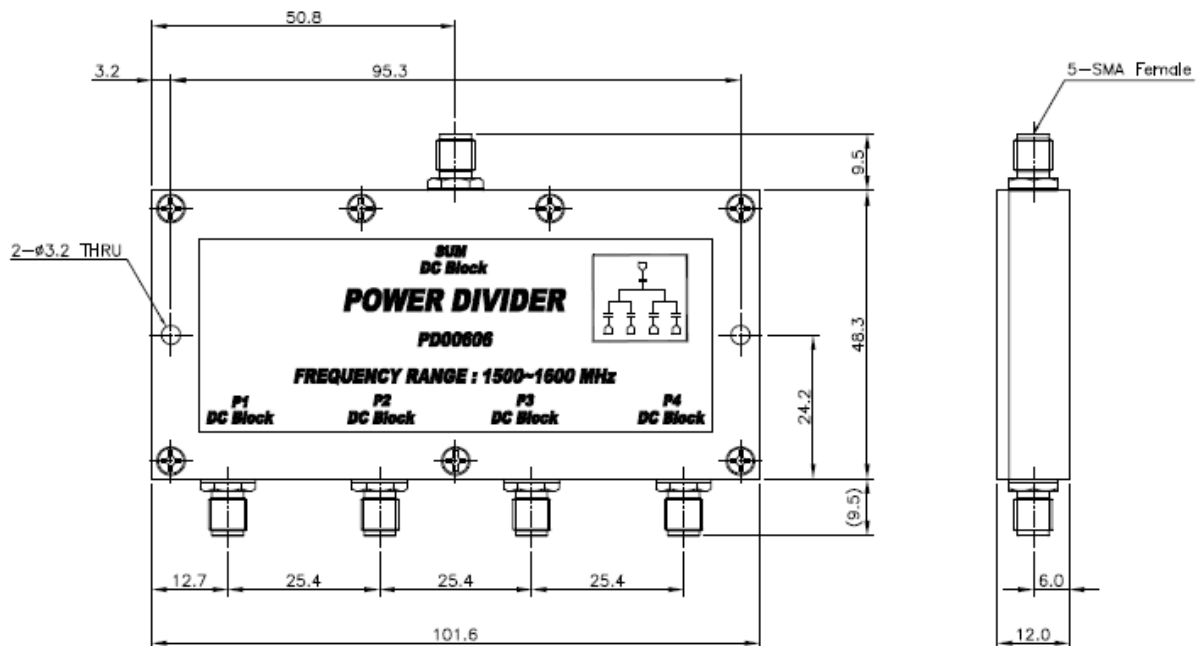


- PD00606-7/1
- 1500~1600 MHz
- 1 W

1. Electrical & Mechanical Specification


Electrical Specifications	
Type	Power Divider
Connector	SMA Type(F)
Frequency Range	1500~1600MHz
Insertion Loss	≤ 6.7 dB
VSWR	≤ 1.2 : 1
Isolation	≥ 20 dB
Power Handling	≤ 1W
Impedance	50Ω
Mechanical Specifications	
Dimensions(mm)	101.6 x 48.3 x 12
Connector Finish	Ni Plate
Housing Finish	White Chromate

2. RF Measurement Data


TR1 : SUM PORT VSWR, TR2: P1 PORT VSWR, TR3: Insertion Loss

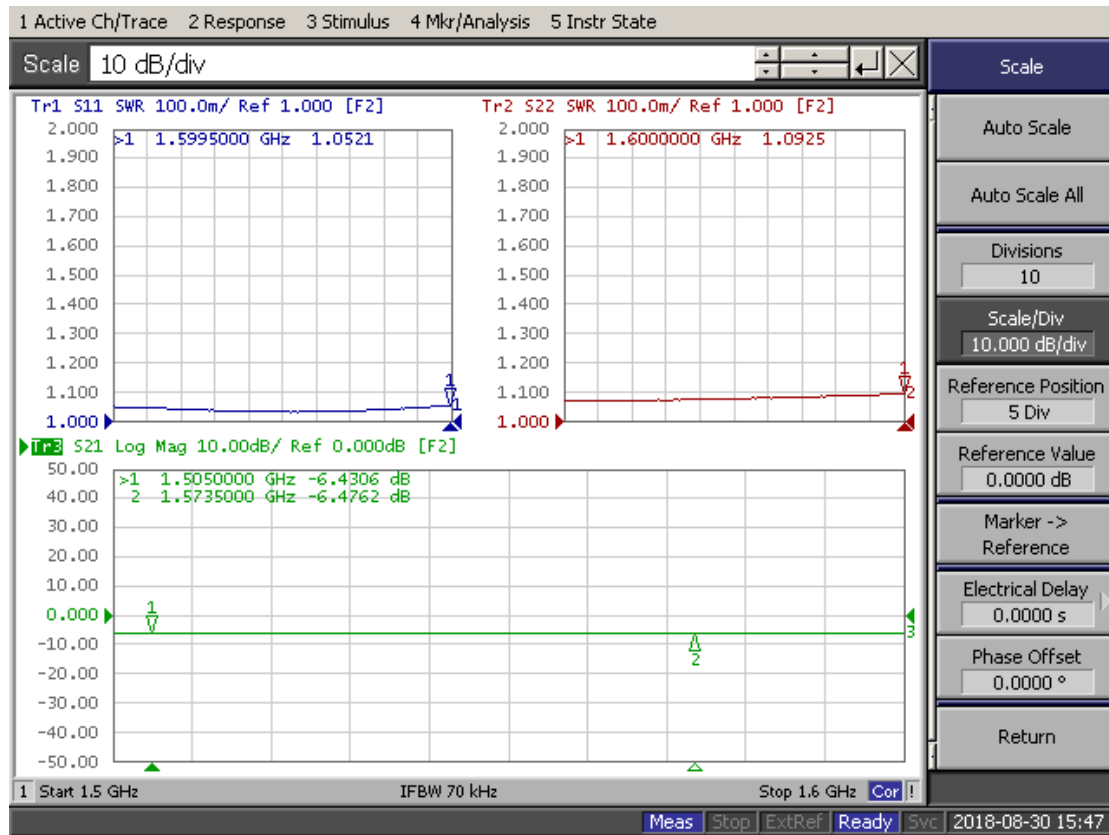


TR1 : SUM PORT VSWR, TR2: P2 PORT VSWR, TR3: Insertion Loss

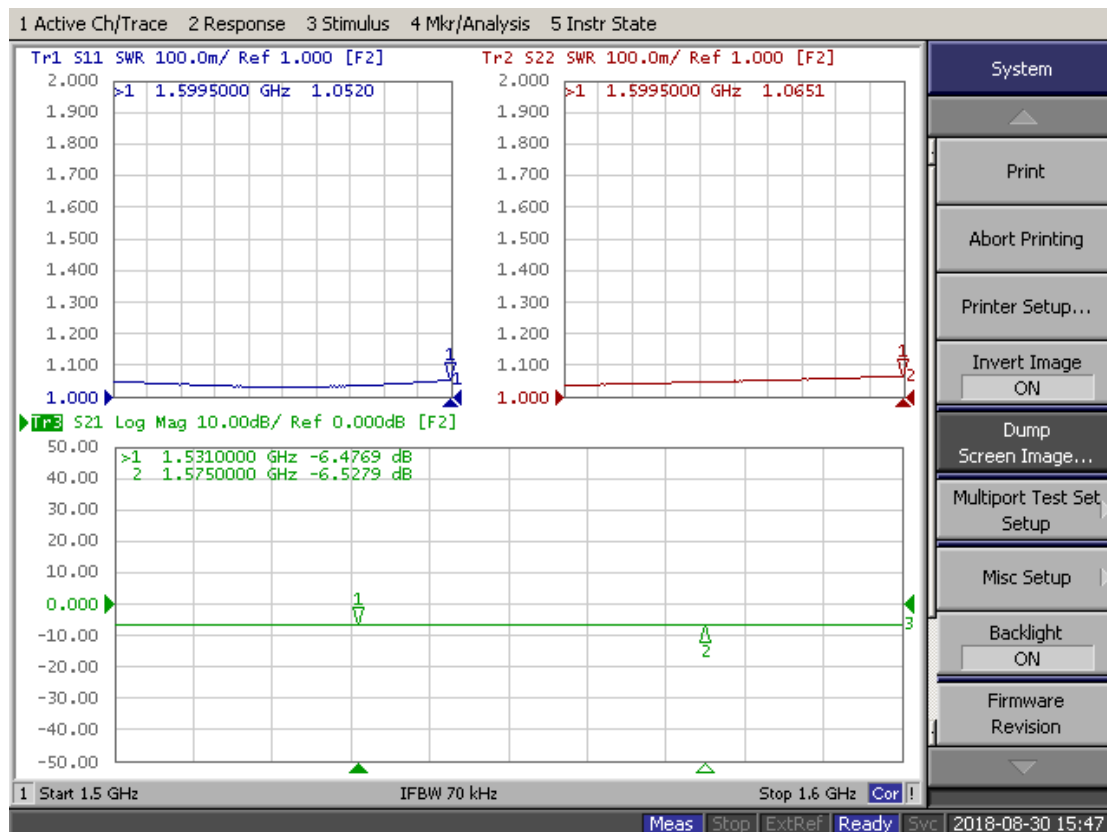


TR1 : SUM PORT VSWR, TR2: P3 PORT VSWR, TR3: Insertion Loss

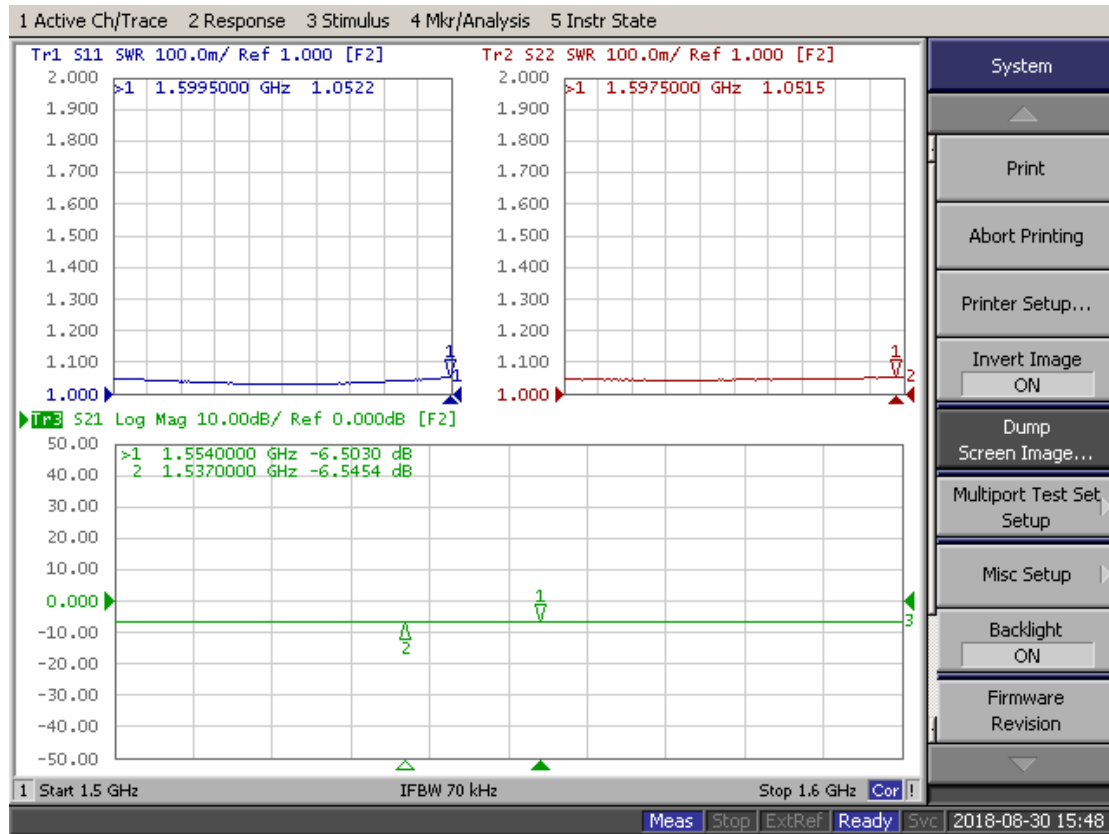


TR1 : SUM PORT VSWR, TR2: P4 PORT VSWR, TR3: Insertion Loss

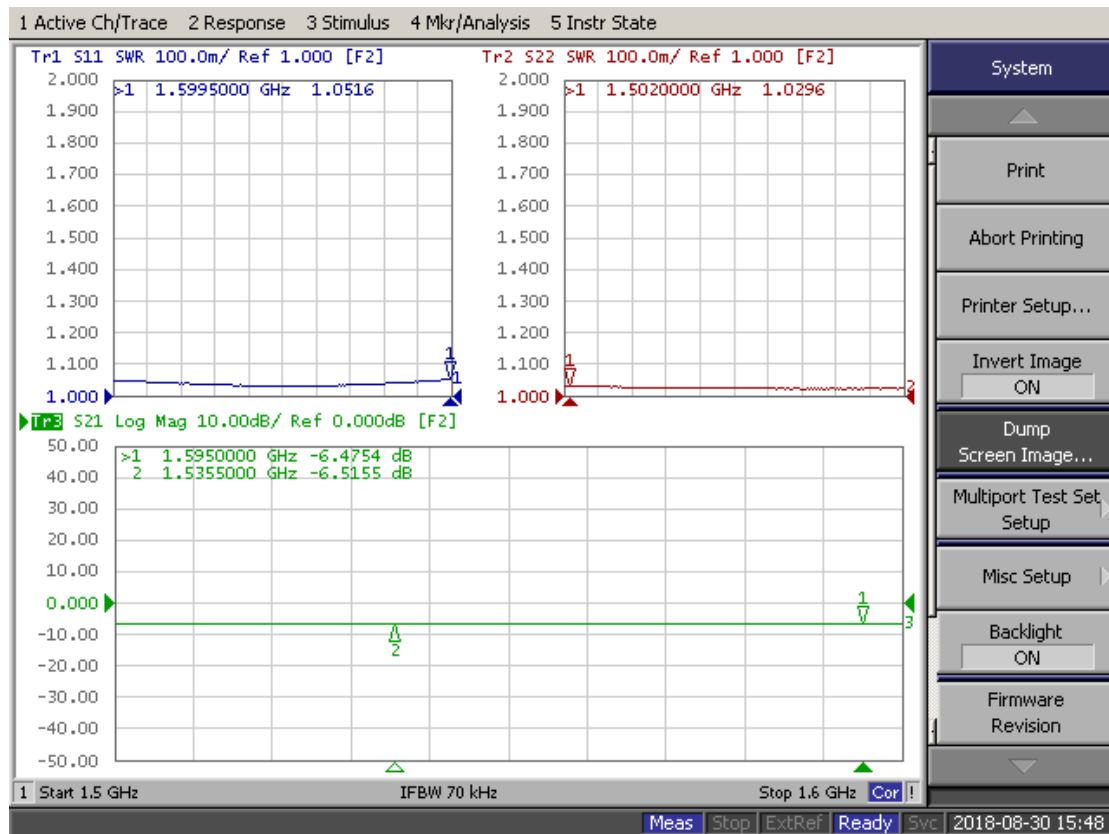

TR1 : P1 PORT VSWR, TR2: P2 PORT VSWR, TR3: Isolation

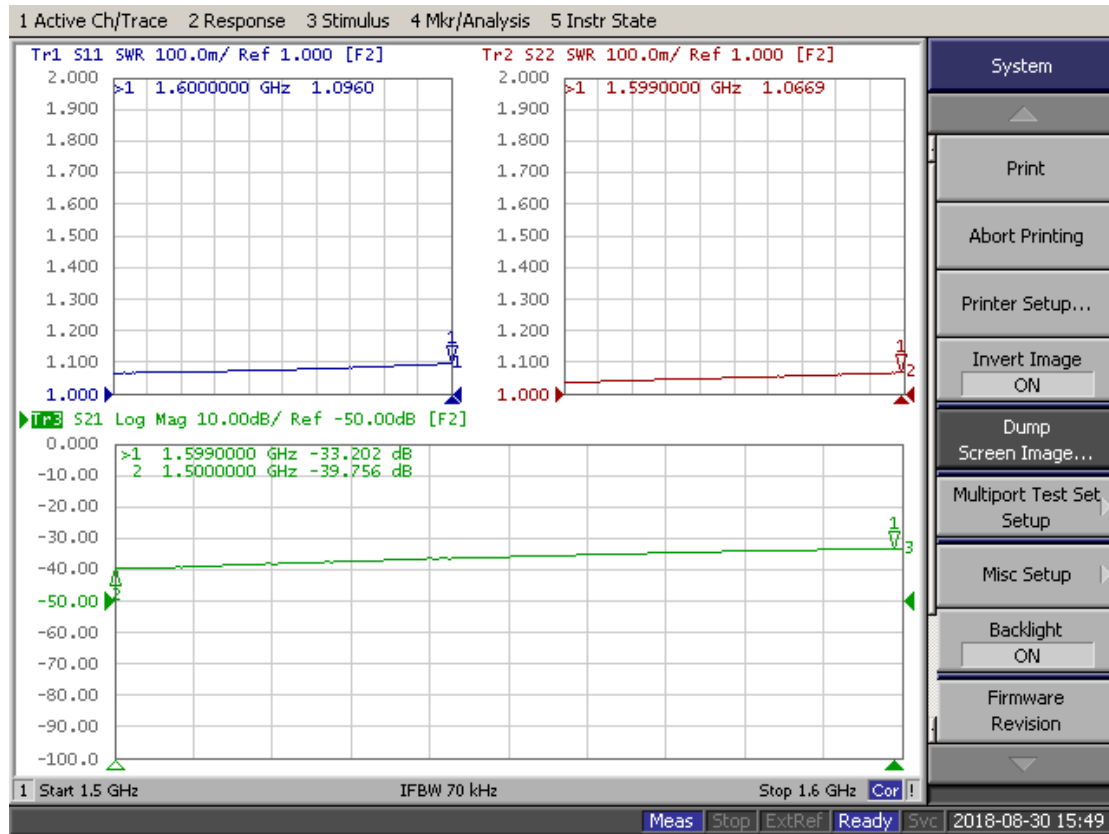

TR1 : P1 PORT VSWR, TR2: P4 PORT VSWR, TR3: Isolation

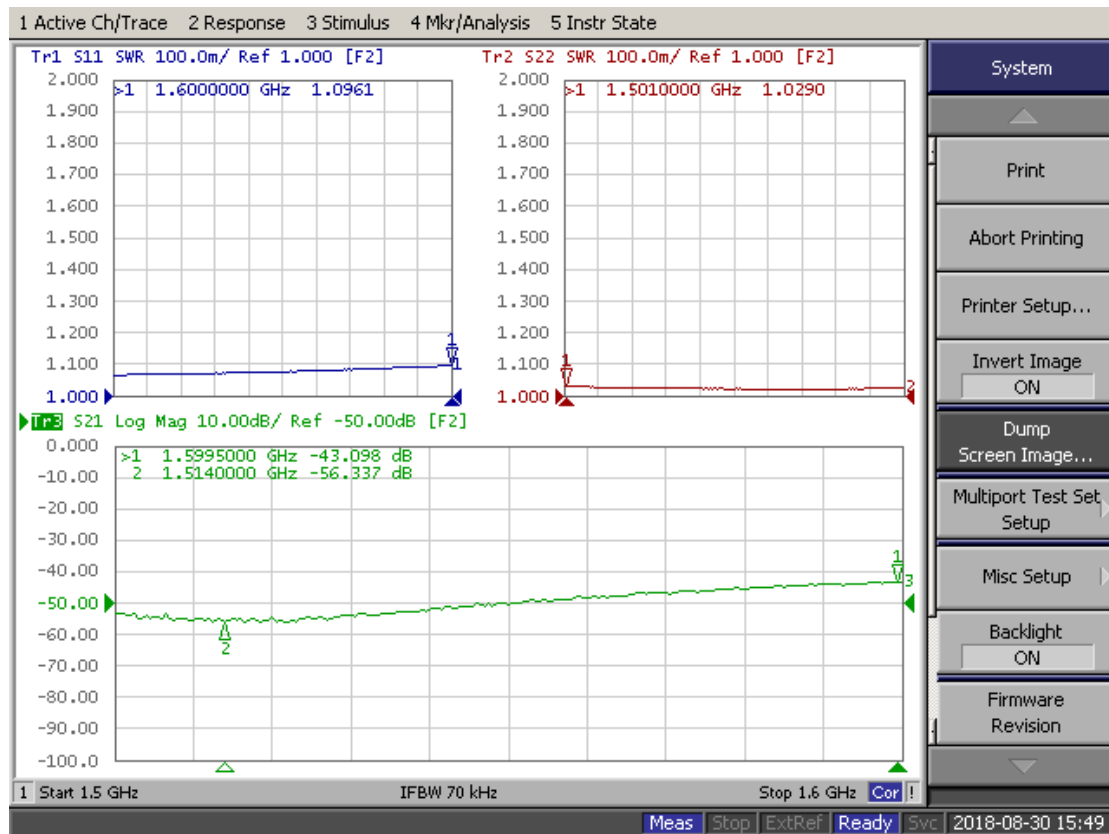

TR1 : P3 PORT VSWR, TR2: P4 PORT VSWR, TR3: Isolation

