


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.08.22.

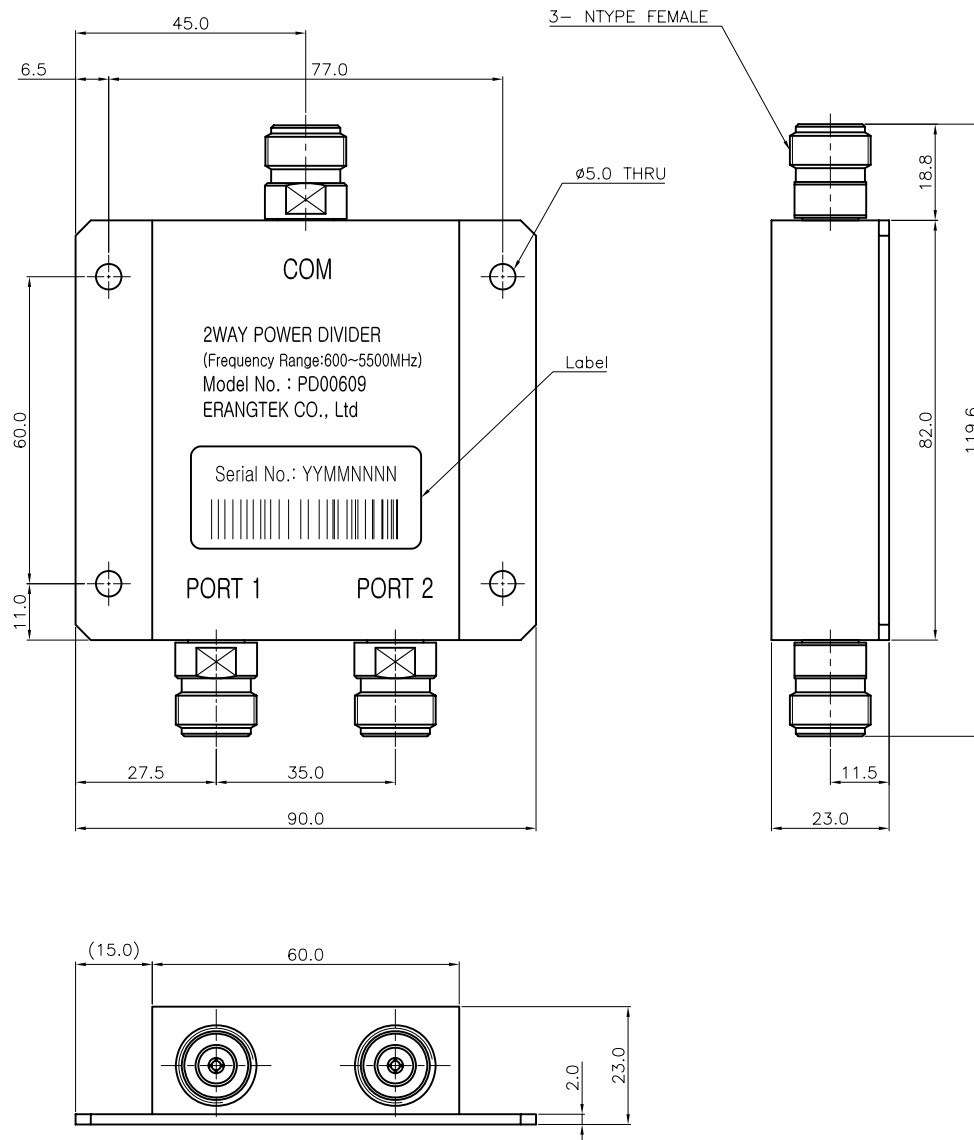

* 포장 주의사항
OUT BOX 벤딩자국 BOX 사용할지 말 것.

* ELECTRICAL SPECIFICATIONS

Frequency Range : 600~5500 MHz
Insertion Loss (Max.) : 4.0dB
V.S.W.R (Max.) : 1.4 : 1
Isolation (Min.) : 18.0dB
Phase Unbalance (Max.) : 8.0°
Power Handling (Max.) : Splitting 50.0W
Combining 6W
PIM(@43dBm 2Tone CDMA) : 3th -120dBc
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS


HOUSING : A6061 T6(DIC-547 Texture)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS

MARKING COLOR: BLACK

* DETAIL LABEL

Serial No : YYMMNNNN
- YY : 제조 년
- MM : 제조 월
- NNNN : Serial No
[Date: 생산일 기준]



TOLERANCE	Decimal ±0.1 Angle ±1°	DATE 2019. 08. 22.	 KJ COMTECH CO., LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
MATERIAL	A6061	APPROVED BY J.H.YOUN CHECKED BY S.L.SON	
FINISH	DIC-547, Texture 도장 온도 : 70°	DRAWN BY S.L.SON	TITLE 2WAY POWER DIVIDER
SCALE	1/1	UNIT mm	DWG NO. PD00609-8/1
			REVISION 1
			SHEET 1 of 1