


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.03.07.

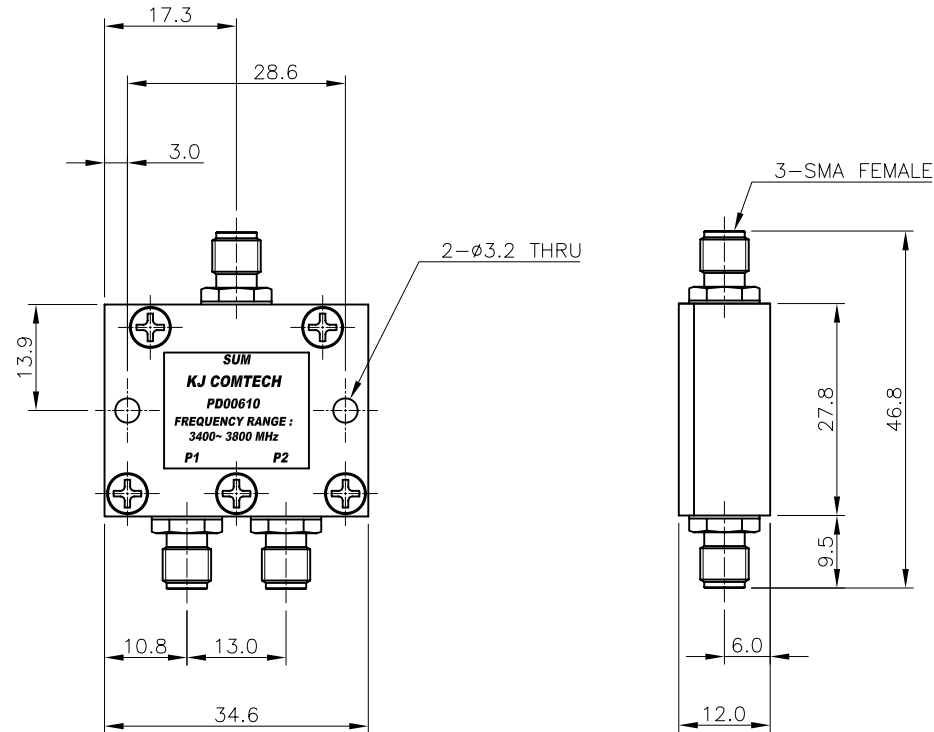

* ELECTRICAL SPECIFICATIONS
Frequency Range : 3400~3800 MHz
Insertion Loss (Max.) : 3.3dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2019. 03. 07.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN		
	$\pm 1^{\circ}$	CHECKED BY			
MATERIAL	A6061 T6	DRAWN BY	S.L.SON		TITLE 2WAY POWER DIVIDER
FINISH White Chromate	SCALE 1/1	UNIT mm		A4	DWG NO. PD00610-7/1
					REVISION 1