


| REVISION |                      |         |          |             |
|----------|----------------------|---------|----------|-------------|
| REV      | DESCRIPTION          | DRAWN   | APPR     | DATE        |
| 1        | Initial Registration | S.L.SON | J.H.YOUN | 2019.03.07. |
|          |                      |         |          |             |

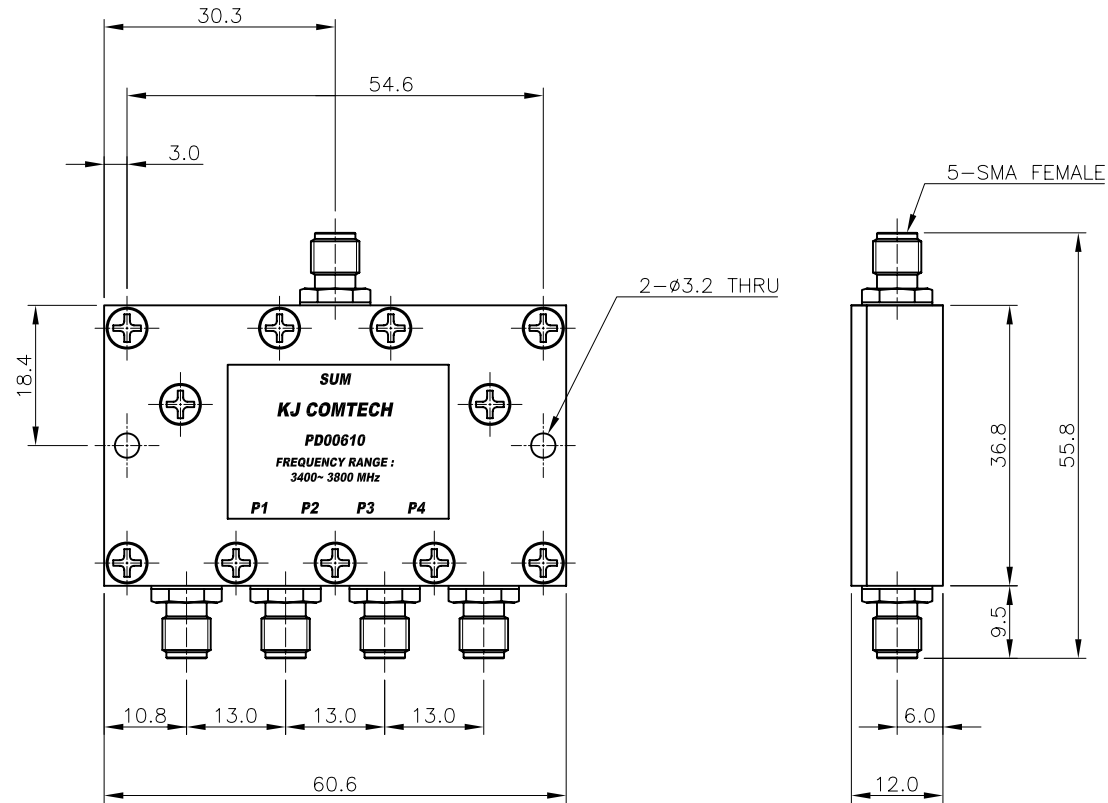

\* ELECTRICAL SPECIFICATIONS  
 Frequency Range : 3400~3800 MHz  
 Insertion Loss (Max.) : 6.5dB  
 V.S.W.R (Max.) : 1.2 : 1  
 Isolation (Min.) : 20.0dB  
 Power Handling (Max.) : 1.0W  
 Impedance : 50Ω

\* MECHANICAL SPECIFICATIONS  
 HOUSING : A6061 T6 (White Chromate)  
 CONNECTORS : MBsBD (Nickel Plate)  
 CONNECTORS PINS : Beryllium Copper (Gold Plate)  
 INSULATORS : TEFLON

|           |                |                    |          |                                                |
|-----------|----------------|--------------------|----------|------------------------------------------------|
| TOLERANCE | Decimal        | DATE 2019. 03. 07. |          |                                                |
|           | Angle          | APPROVED BY        | J.H.YOUN |                                                |
| MATERIAL  | A6061 T6       | CHECKED BY         |          | TITLE<br>4WAY POWER DIVIDER                    |
|           |                | DRAWN BY           | S.L.SON  |                                                |
| FINISH    | White Chromate | SCALE              | 1/1      | DWG NO. PD00612-7/1<br>REVISION 1 SHEET 1 of 1 |
|           |                | UNIT               | mm       |                                                |