



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.01.18.

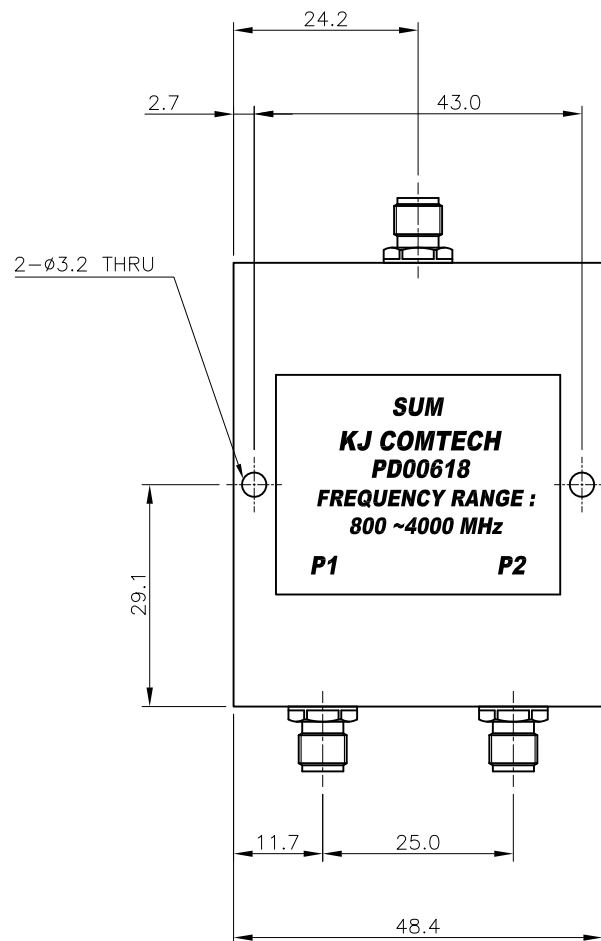


3-SMA FEMALE

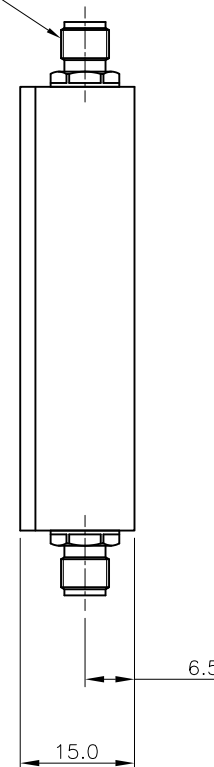

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800~4000 MHz
V.S.W.R (Max.) : 1.25 : 1
Insertion Loss (Max.) : 3.7dB
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2022. 01. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	S.L.SON		
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	TITLE 2WAY POWER DIVIDER	
		DRAWN BY	K.S.KIM		
FINISH White Chromate		SCALE 1/1	UNIT mm	 A4	DWG NO. PD00618-7/1 REVISION 1 SHEET 1 of 1