


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.01.18.

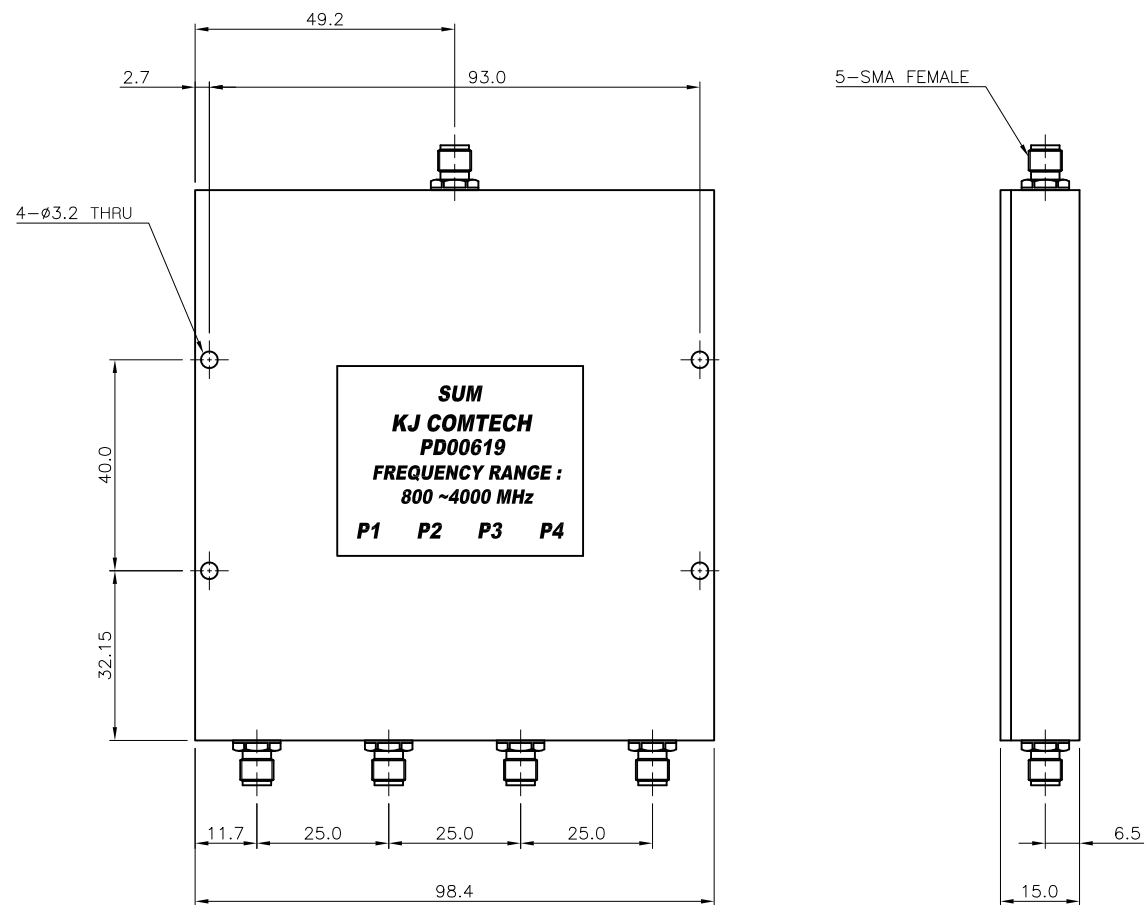

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 800.0 ~4000.0MHz
 V.S.W.R (Max.) : 1.3 : 1
 Insertion Loss (Max.) : 7.0dB
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Gold)
 CONNECTORS PINS : Beryllium Copper (Gold)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2022. 01. 18.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON	
	±1°	CHECKED BY	S.L.SON	
MATERIAL		DRAWN BY	K.S.KIM	TITLE 4WAY POWER DIVIDER DWG NO. PD00619-N/1 REVISION 1 SHEET 1 of 1
FINISH		SCALE	1/1	
White Chromate		UNIT	mm	