
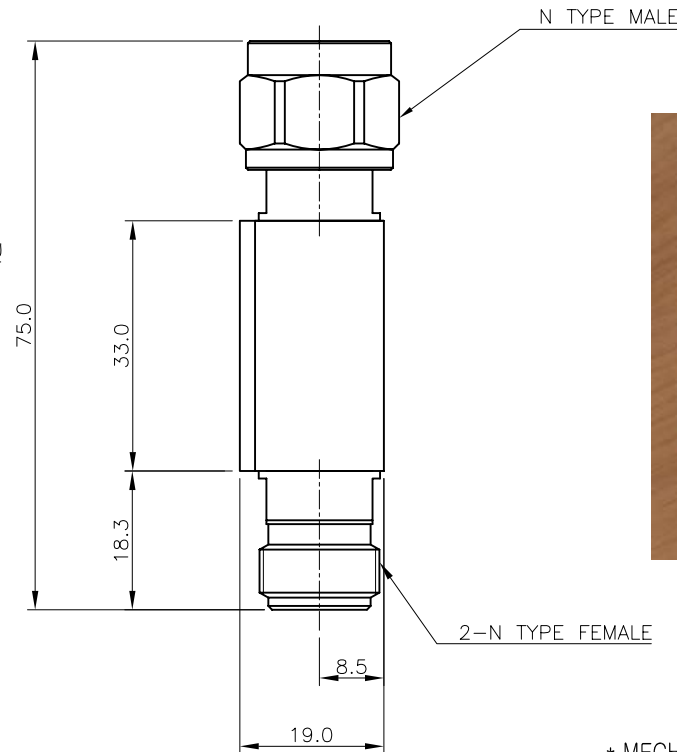


* N Male Connector 조립 시 Coupling Cap을 조립하지 말것.
(도장 후 조립함.)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.08.07.

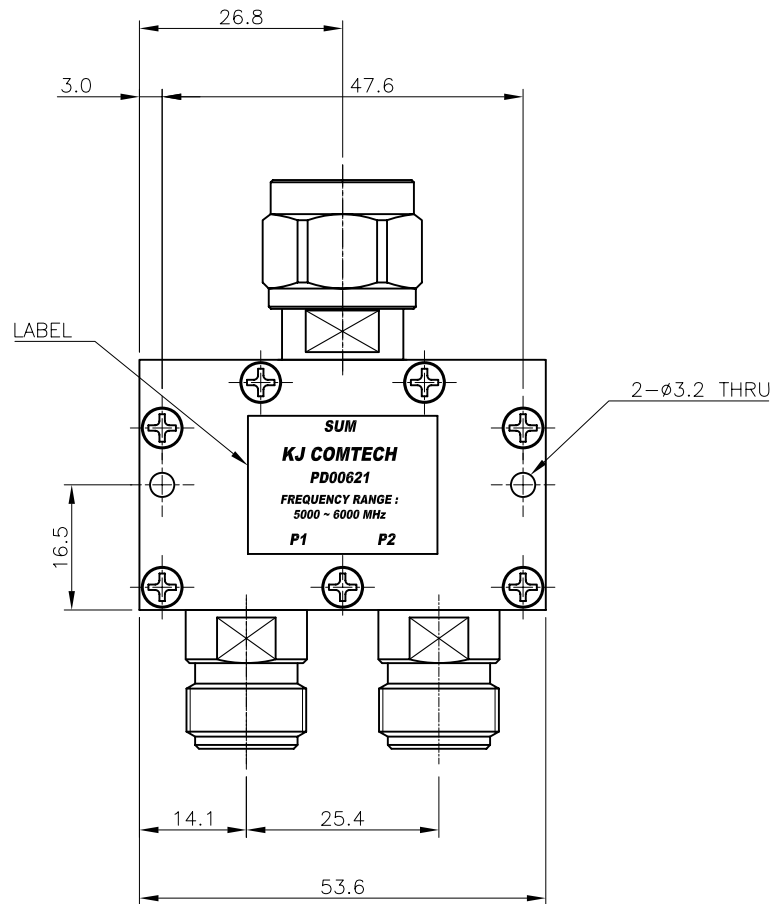

도장 범위

* ELECTRICAL SPECIFICATIONS
Frequency Range : 5000~6000 MHz
Insertion Loss (Max.) : 3.3dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* ENVIRONMENTAL SPEC
IP-67
Operating Temperature Range :
-40.0℃ ~ +85.0℃

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (DIC-547 Texture)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2019. 08. 07.	 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH	DIC-547 Texture	SCALE	1/1	A4 DWG NO. PD00621-6/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

1. 제품 별 포장



2. 중박스 DBX00006-N/1 10PCS 포장 후 측면 현품표 부착



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.08.07.

3. 대박스에(DBX00145-N/1) 중박스 8PCS 포장 측면에 현품표 부착 (제품수량: 80PCS)



TOLERANCE	Decimal	DATE 2019. 08. 07.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH	DIC-547 Texture	SCALE	UNIT	DWG NO. PD00621-6/1 REVISION 1 SHEET 1 of 1
		1/1	mm	