
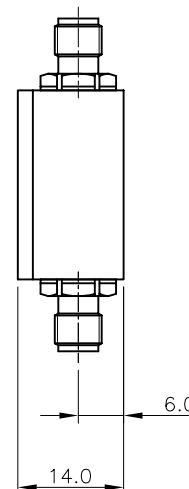


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.11.26.

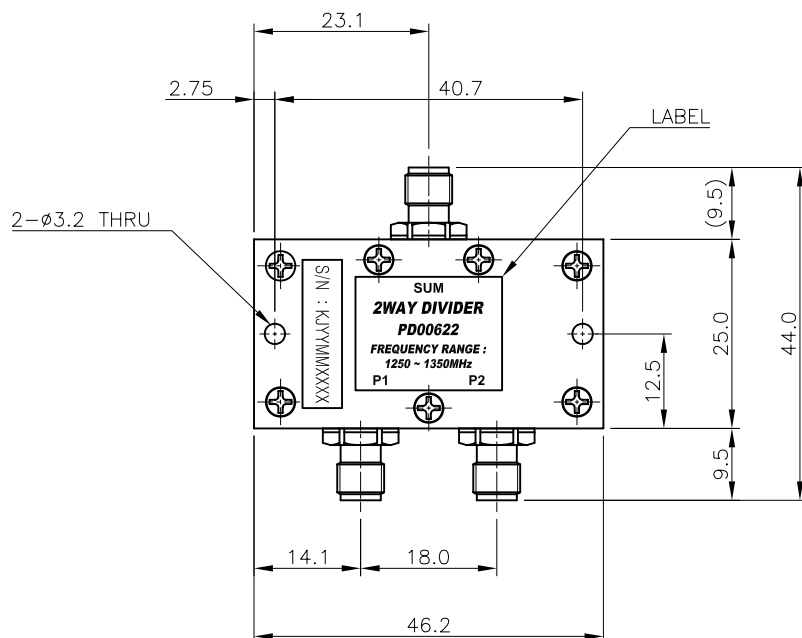

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1250.0 ~ 1350.0MHz

Insertion Loss (Max.) : 3.3dB

V.S.W.R (Max.) : 1.15 : 1

Isolation (Min.) : 30.0dB

Phase Balance(P-P Max.) : 2.0°

Power Handling (Max.) : 30.0W (Impulse Power @Input Port)

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

RoHS COMPLIANT

* OTHER SPECIFICATIONS

MARKING COLOR : BLACK

* ENVIRONMENTAL SPEC

IP-65

* DETAIL LABEL

Serial No : KJYYMMNNNN

- YY : Year

- MM: Month

- NNNN : Serial No

TOLERANCE	Decimal	DATE 2019. 11. 26.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00622-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	